




Dial Gauge, Lug Back, ISO Type

Item number: 3046A

Images

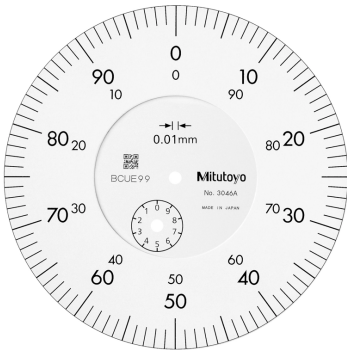




Description

This is a standard dial indicator. It offers you the following benefits:

- Large-diameter dial face $\varnothing = 78$ mm for easy reading
- 0,01 / 0,001 mm graduation

Specification

Digital/Analog:	Analog
Inch-Metric:	Metric
Type:	EN ISO Standard
Delivered:	With certificate of inspection
Range:	10 mm
Range per rev.:	1 mm
Dial reading:	± 0.0 -100.0
Graduation:	0.01 mm
MPE any 1/10 revolution:	5 μ m
MPE any 1/2 revolution:	9 μ m
MPE any 1 revolution:	10 μ m
MPE measuring range:	15 μ m
H MPE (Hysteresis):	3 μ m
R MPE (Repeatability):	3.0 μ m
Measuring force:	0,4-1,4 N
Mass:	252 g
Stem:	8.0 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Continuous dial:	Yes

Dimensions**A:** 59.6 mm**B:** 75.5 mm**C:** 78 mm**D:** 17.7 mm**E:** 21 mm**F:** 15.9 mm**G:** 20.6 mm**H:** 71 mm**I:** 9 mm**Accessories****Optional accessories:****Limit Hands (green) 2pcs**Dial Indicator Series 2/3/4
Art No. 21AZB195**Bezel Clamp for Dial Gauge**Metric, Series 2/3/4
Art No. 21AZB148**Spindle Lifting Lever**for Digital Indicator, A-Type Dial Indicator
Serie 2/3/4

Art No. 21EZA198

£7.70 ex. VAT

Spindle Lifting Cable

for Indicator, L=500mm
Art No. 21JZA295



Spindle Lifting Cable with Auto Stop

for Indicator, L=300mm
Art No. 21JZA301



Spare parts

Consumable spares:



Contact Element Ball Point, M2,5x0,45

7,3mm Length, Carbide, Metric
Art No. 901312
£7.70 ex. VAT