




Dial Gauge, Lug Back, ISO Type

Item number: 3052A-19

Images

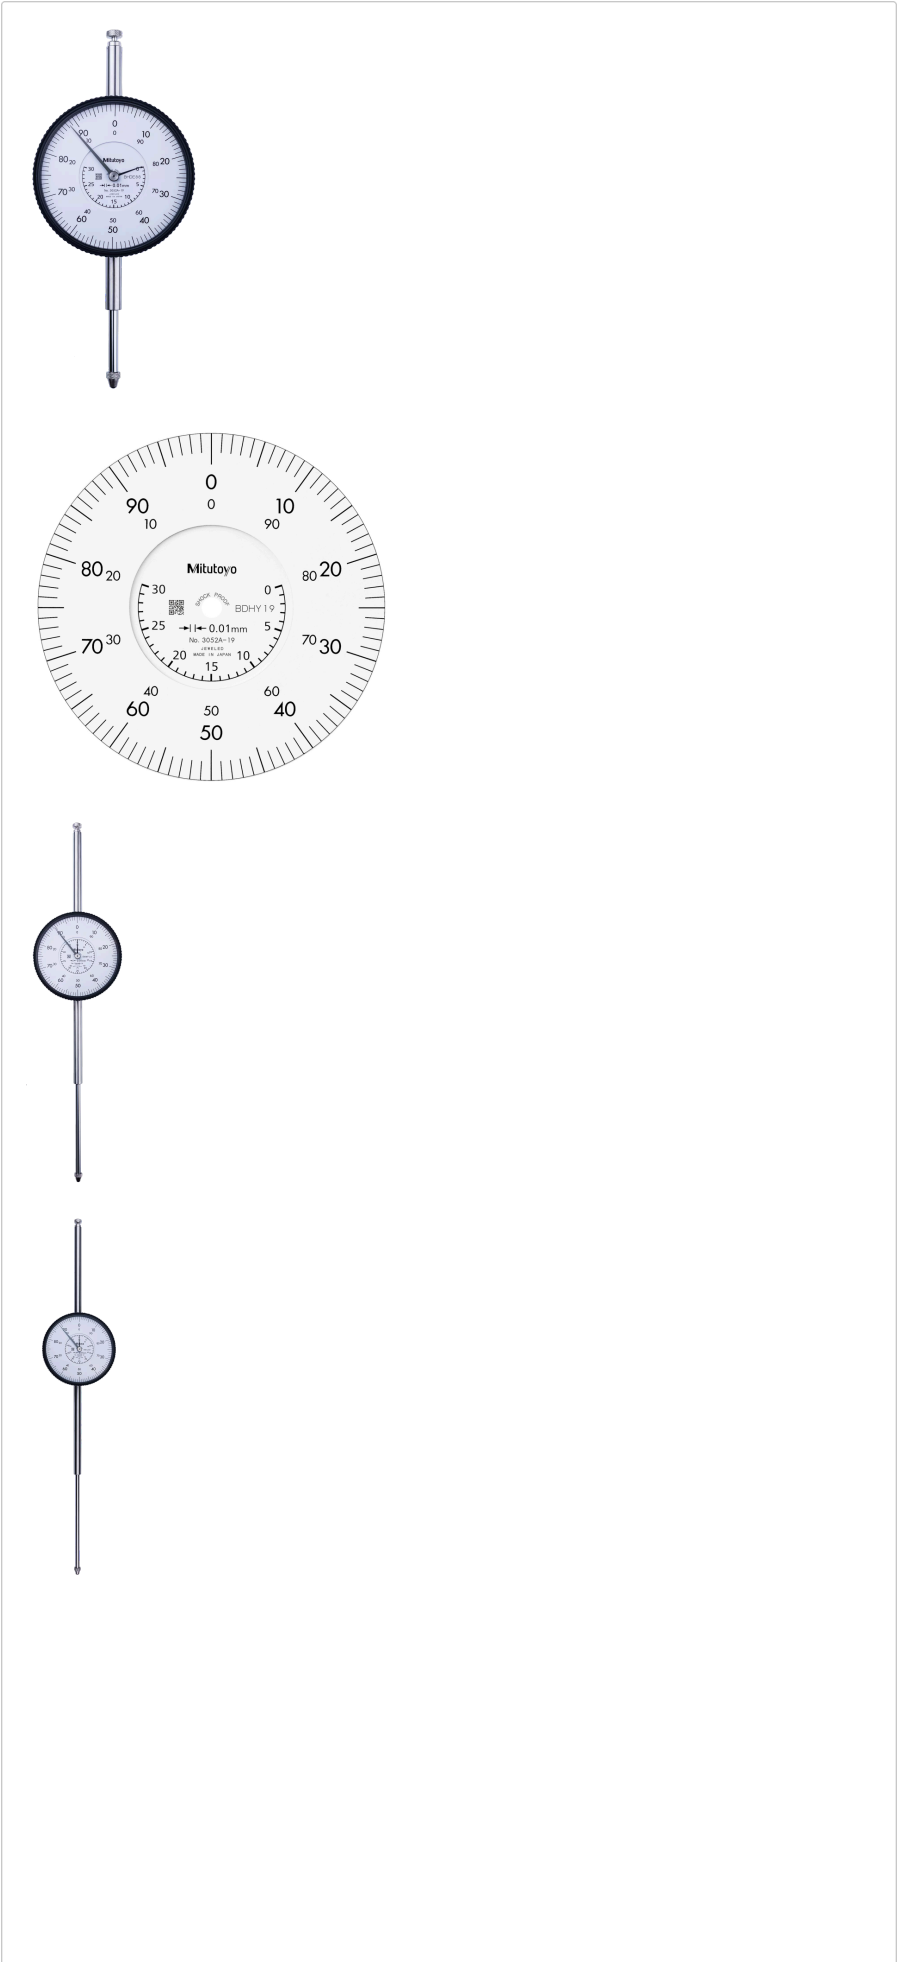



Description

This is a standard dial indicator. It offers you the following benefits:

- Large-diameter dial face $\varnothing = 78$ mm for easy reading
- 0,01 / 0,001 mm graduation

Specification

Digital/Analog:	Analog
Inch-Metric:	Metric
Type:	EN ISO Standard
Delivered:	With certificate of inspection
Range:	30 mm
Range per rev.:	1 mm
Dial reading:	± 0.0 -100.0
Graduation:	0.01 mm
MPE any 1/10 revolution:	10 μ m
MPE any 1/2 revolution:	11 μ m
MPE any 1 revolution:	12 μ m
MPE measuring range:	25 μ m
H MPE (Hysteresis):	5 μ m
R MPE (Repeatability):	3.0 μ m
Measuring force:	0,4-2,5 N
Mass:	285 g
Stem:	8.0 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Continuous dial:	Yes

Coaxial revolution counter:	Yes
Shockproof:	Yes

Dimensions

A: 72.9 mm

B: 104.3 mm

C: 78 mm

D: 17.7 mm

E: 21 mm

F: 25.9 mm

G: 39.4 mm

H: 71 mm

I: 9 mm

Accessories

Optional accessories:

Limit Hands (green) 2pcs

Dial Indicator Series 2/3/4
Art No. 21AZB195

Bezel Clamp for Dial Gauge

Metric, Series 2/3/4
Art No. 21AZB148

Spare parts

Consumable spares:

**Contact Element Ball Point,
M2,5x0,45**

8,3mm Length, Metric

Art No. 21AZA319

£4.10 ex. VAT
