


Dial Test Indicator, Horiz. 20° Face

Item number: 513-442-16T

Images

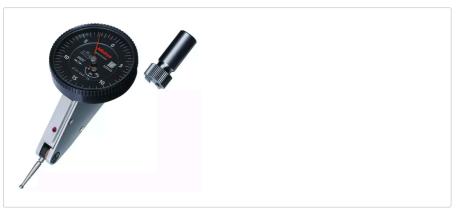

Description

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:

- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	In a box with stem ø3/8" (9.52 mm) / 0.157" (4 mm), stylus ø0.039"/0.079"/0.118", swivel clamp / holding bar
Range:	0,06 "
Dial reading:	0-15-0
Graduation:	0.0005"
H MPE (Hysteresis):	0.0002"
R MPE (Repeatability):	±0.0002"
MPE first one revolution:	±0.0005"
MPE first 2 1/2 revolutions:	±0.0005"
Measuring force:	0,01-0,3 N
Mass:	48 g
Contact point:	Thread M 1.7 x 0.35
Remarks:	Full set

Accessories

Optional accessories:



Limit Hands (Green) 2 pcs.

Dial Indicator Series 1, Test Indicator Art No. 21AAB363

Standard accessories:

Point Dia 2mm/513

L=0.76" Art No. 133195



Stem for Standard Type Series 513



D=4mm Art No. 21CAB106 £7.80 ex. VAT

Art No. 901162



Stylus for Series 513



Ø0,04", 0,79" length, Steel Art No. 133196 £6.20 ex. VAT

Art No. 21CAB105



Stylus for Series 513



à 0,12",0,79" length, Steel Art No. 133197 £6.20 ex. VAT

Knurled Clamp Ring for Stem



Lever Indicator Serie 513 Art No. 190322 £4.50 ex. VAT