



Dial Test Indicator, Horiz. 20° Face

Item number: 513-446-16T

Images



Description

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:


- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	In a box with stem $\varnothing 3/8$ " (9.52 mm) / 0.157" (4 mm), stylus $\varnothing 0.039$ "/0.079"/0.118", swivel clamp / holding bar
Range:	0,06 "
Dial reading:	0-15-0
Graduation:	0.0005"
H MPE (Hysteresis):	0.0002"
R MPE (Repeatability):	± 0.0002 "
MPE first one revolution:	± 0.0005 "

MPE first 2 1/2 revolutions:	±0.0005"
Measuring force:	0,01-0,3 N
Mass:	48 g
Contact point:	Thread M 1.7 x 0.35
Remarks:	Full set

Dimensions

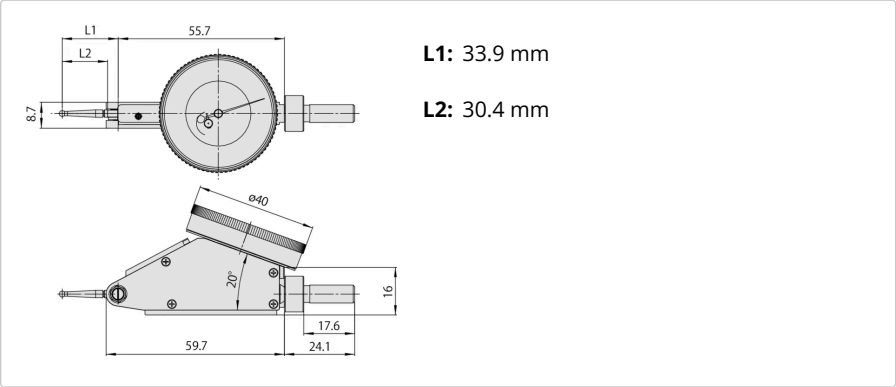

Accessories

Optional accessories:



Limit Hands (Green) 2 pcs.

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363

Standard accessories:



Stylus for Series 513

~ 2mm, 1,20" length
Art No. 136290



Stem for Standard Type Series 513

D=4mm
Art No. 21CAB106
£7.80 ex. VAT

Art No. 901162



Stylus for Series 513

Ø1mm, 1,20" length, Carbide
Art No. 136291
£4.20 ex. VAT



Art No. 21CAB105



Stylus for Series 513

Ø3mm, 1,20" length
Art No. 136292





Knurled Clamp Ring for Stem

Lever Indicator Serie 513

Art No. 190322

£4.50 ex. VAT