




Dial Test Indicator, Vertical Type

Item number: 513-455-10A

Images

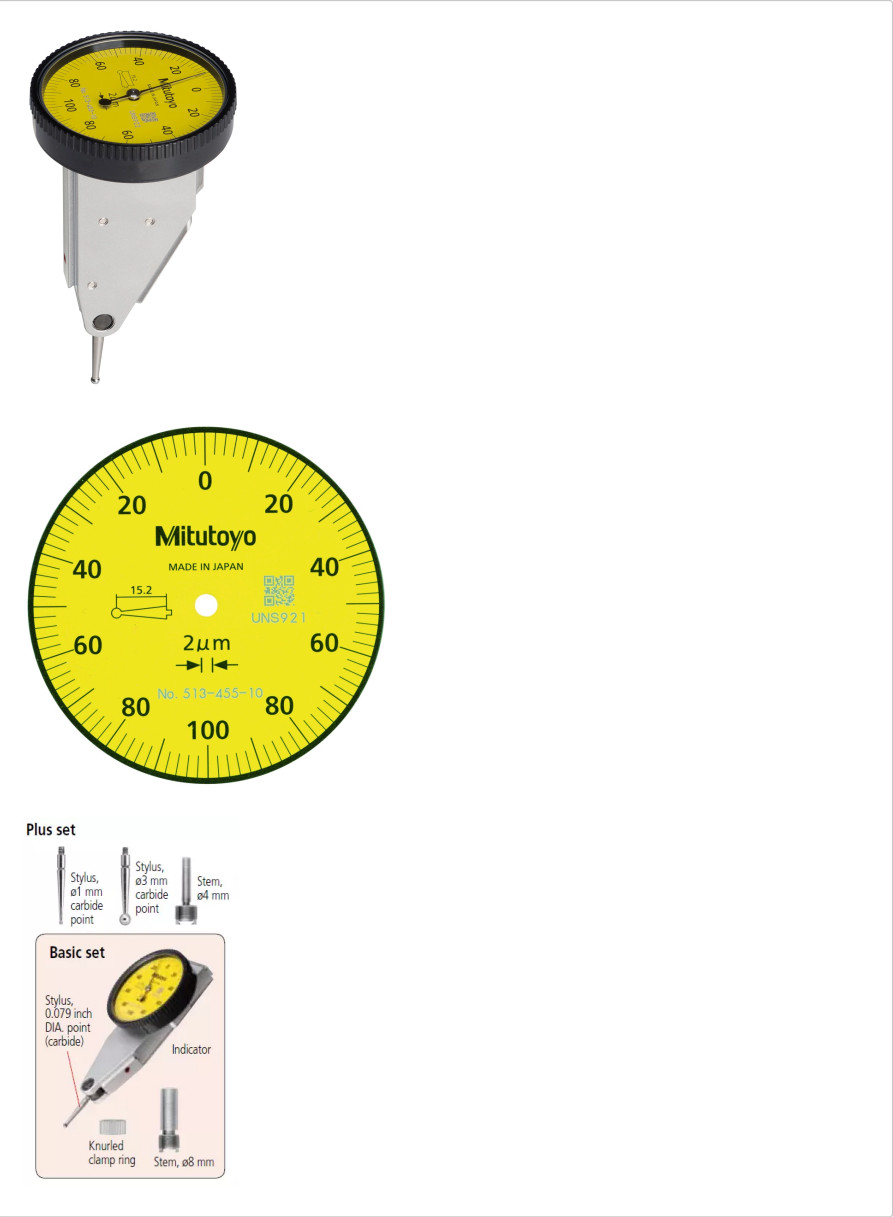

Description

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:


- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.

Specification

Digital/Analog:	Analog
Inch-Metric:	Metric
Delivered:	In a box with stem ø8/4 mm, stylus ø1/2/3 mm

Range:	0.2 mm
Graduation:	0.002 mm
MPE any 10 scale divisions:	2 μm
MPE any 1/2 revolution:	3 μm
MPE measuring range:	3 μm
H MPE (Hysteresis):	2 μm
R MPE (Repeatability):	1 μm
Mass:	46 g
Contact point:	Thread M 1.7 x 0.35
Remarks:	Plus set

Dimensions

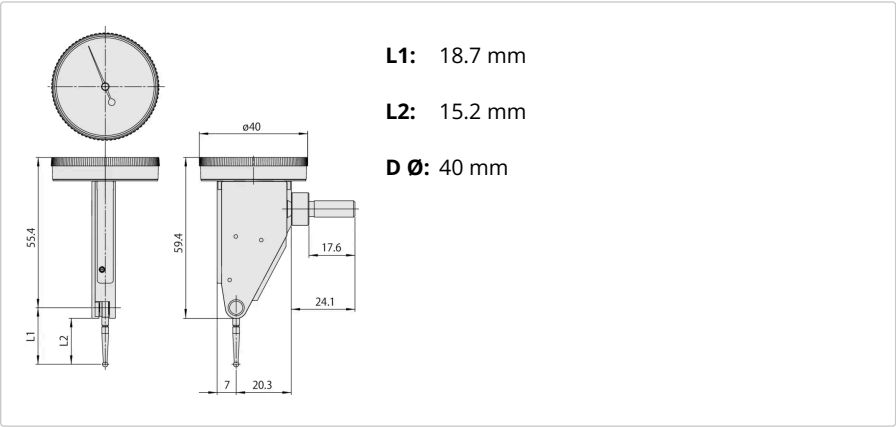

Accessories

Optional accessories:



Limit Hands (Green) 2 pcs.

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363

Standard accessories:



Stem for Standard Type Series 513

D=4mm
Art No. 21CAB106
£7.80 ex. VAT



Stem for Standard Type Series 513

D=8mm
Art No. 21CAB104
£5.60 ex. VAT



Knurled Clamp Ring for Stem

Lever Indicator Serie 513
Art No. 190322
£4.50 ex. VAT



Stylus for Serie 513

D= 1mm, 15,2mm Length, Carbide
Art No. 131314
£6.70 ex. VAT

Stylus for Serie 513

D= 2mm, 15,2mm Length, Carbide

Art No. 103011

£10.30 ex. VAT**Stylus for Serie 513**

D= 3mm, 15,2mm Length, Carbide

Art No. 131315

£6.70 ex. VAT