




Dial Test Indicator, Horizontal, Compact

Item number: 513-465-10E

Images

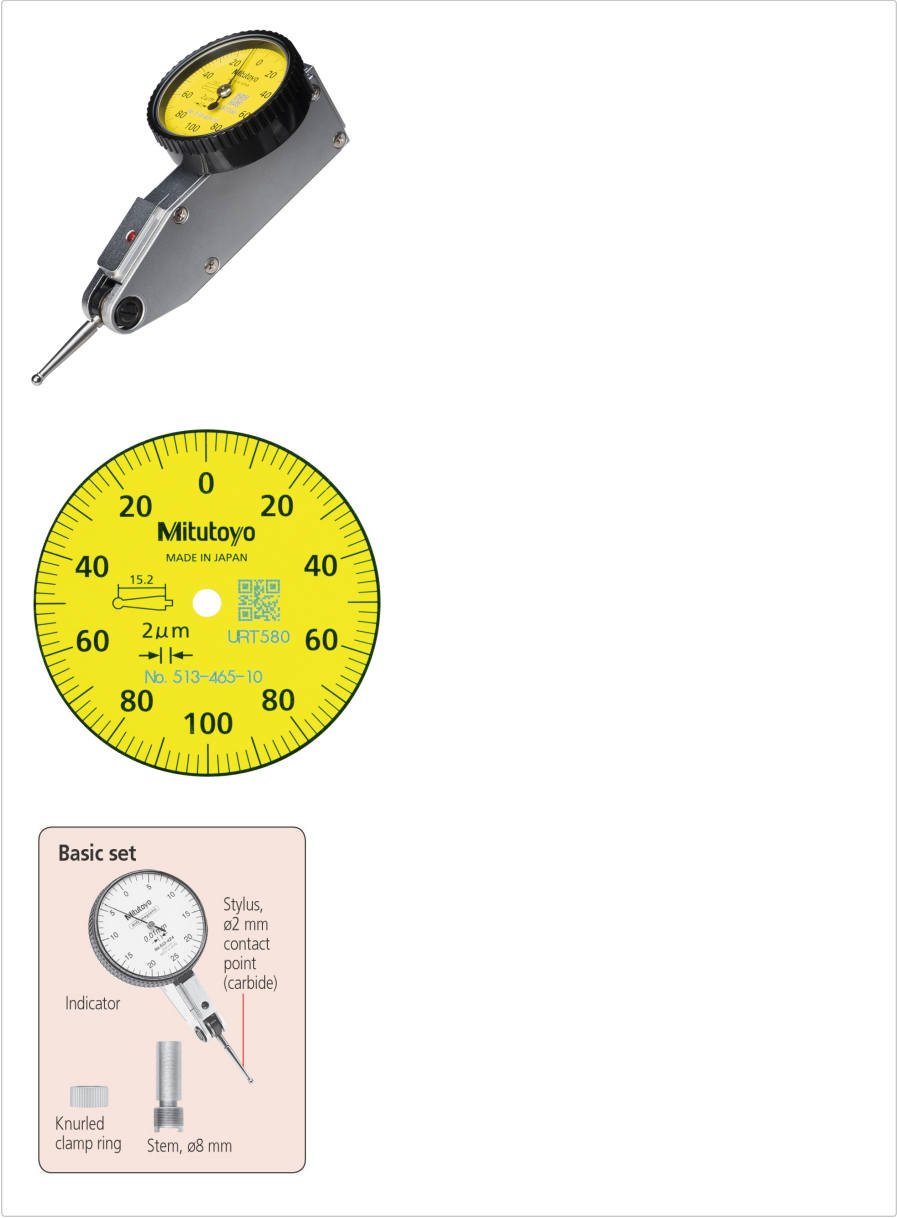

Description

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:


- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement.

Specification

Digital/Analog:	Analog
-----------------	--------

Inch-Metric:	Metric
Delivered:	In a box with stem $\varnothing 8$ mm, stylus $\varnothing 2$ mm
Range:	0.2 mm
Dial reading:	0-100-0
Graduation:	0.002 mm
MPE any 10 scale divisions:	2 μm
MPE any 1/2 revolution:	3 μm
MPE measuring range:	3 μm
H MPE (Hysteresis):	2 μm
R MPE (Repeatability):	1 μm
Measuring force:	0,01 - 0,3 N
Carbide stylus tip $\varnothing 2$ mm No.:	103011
Mass:	41 g
Contact point:	Thread M 1.7 x 0.35
Remarks:	Basic set

Dimensions

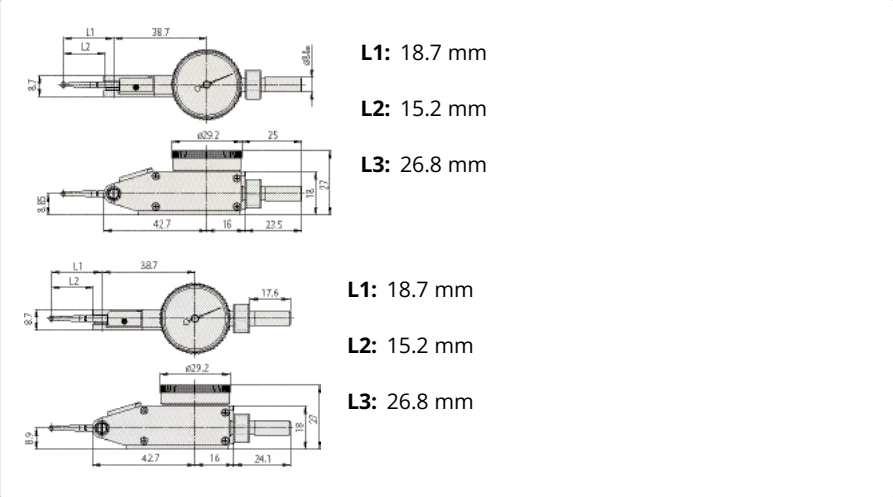

Accessories

Optional accessories:

**Limit Hands (Green) 2 pcs.**

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363

Standard accessories:**Stem for Standard Type Series 513**

D=8mm
Art No. 21CAB104
£5.60 ex. VAT

**Stylus for Serie 513**

D= 2mm, 15,2mm Length, Carbide
Art No. 103011
£10.30 ex. VAT

**Knurled Clamp Ring for Stem**

Lever Indicator Serie 513
Art No. 190322
£4.50 ex. VAT

