




Dial Test Indicator Parallel Type

Item number: 513-482-10T

Images

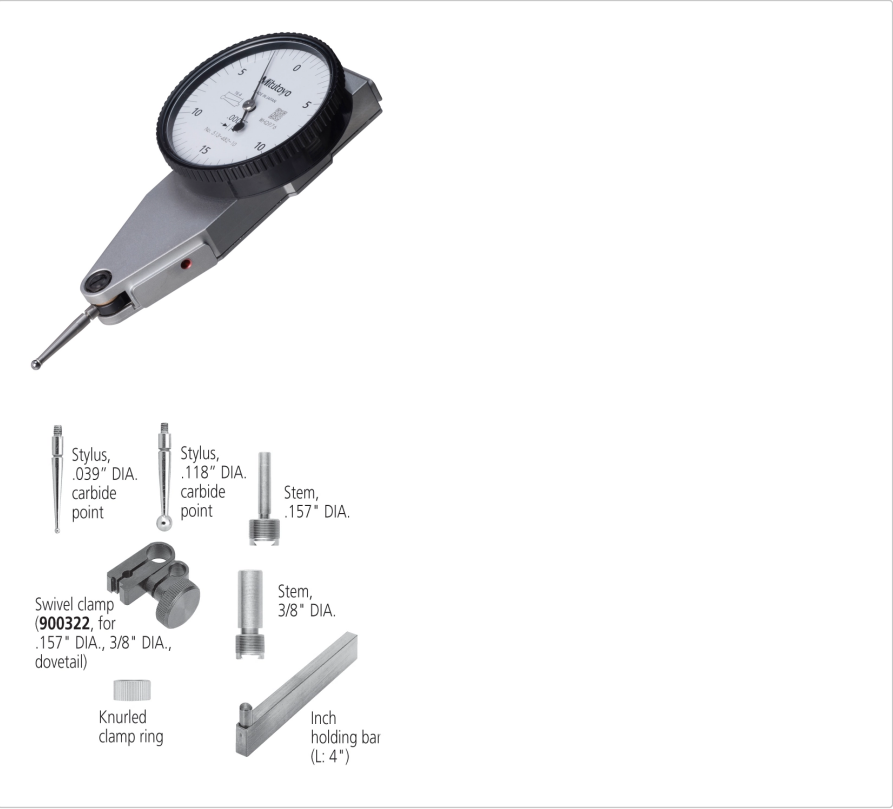

Description


A Mitutoyo versatile lever indicator (or dial test indicator, DTI) suited to alignment operations on machine tools and similar applications. This indicator automatically adapts to the required measuring direction on contact, and the jewelled movement provides lowest friction and stiction for smooth and precise operation. Supplied with a comprehensive set of mounting accessories and interchangeable styli that enable immediate use in almost any situation.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	In a box with stem $\varnothing 3/8"$ (9,52 mm) / 0,157" (4 mm), stylus $\varnothing 0,039"/0,079"/0,118"$, swivel clamp / holding bar
Dial reading:	0-15-0
Graduation:	0.0005"
H MPE (Hysteresis):	0.0002"
R MPE (Repeatability):	$\pm 0.0002"$
MPE first one revolution:	$\pm 0.0005"$
Measuring force:	0,01-0,3 N

Mass:	68 g
Contact point:	Thread M 1.7 x 0.35
Remarks:	Full set

Dimensions

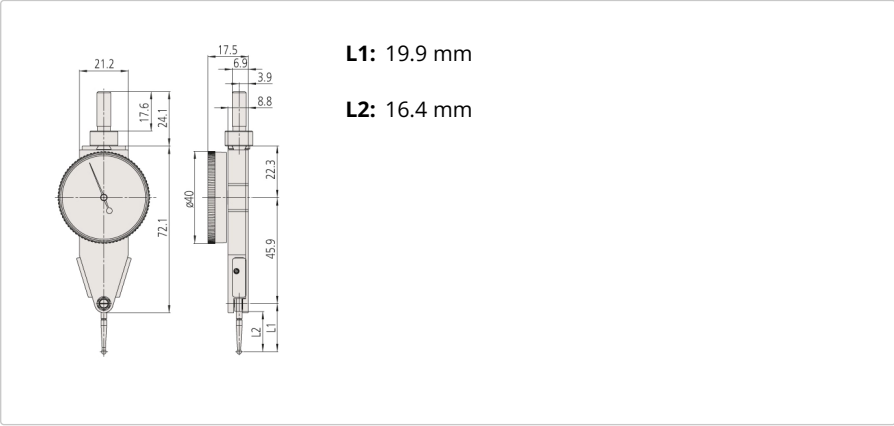

Accessories

Optional accessories:



Limit Hands (Green) 2 pcs.

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363

Standard accessories:



Stem for Standard Type Series
513

D=4mm
Art No. 21CAB106
£7.80 ex. VAT

Art No. 21CAB105



Knurled Clamp Ring for Stem

Lever Indicator Serie 513

Art No. 190322

£4.50 ex. VAT



Point Dia 2mm/513

L=0.76"

Art No. 133195



Stylus for Series 513

Ø0,04", 0,79" length, Steel

Art No. 133196

£6.20 ex. VAT



Stylus for Series 513

Ã 0,12",0,79" length, Steel

Art No. 133197

£6.20 ex. VAT

Art No. 901162

