




Dial Test Indicator, Parallel Type

Item number: 513-484-10A

Images

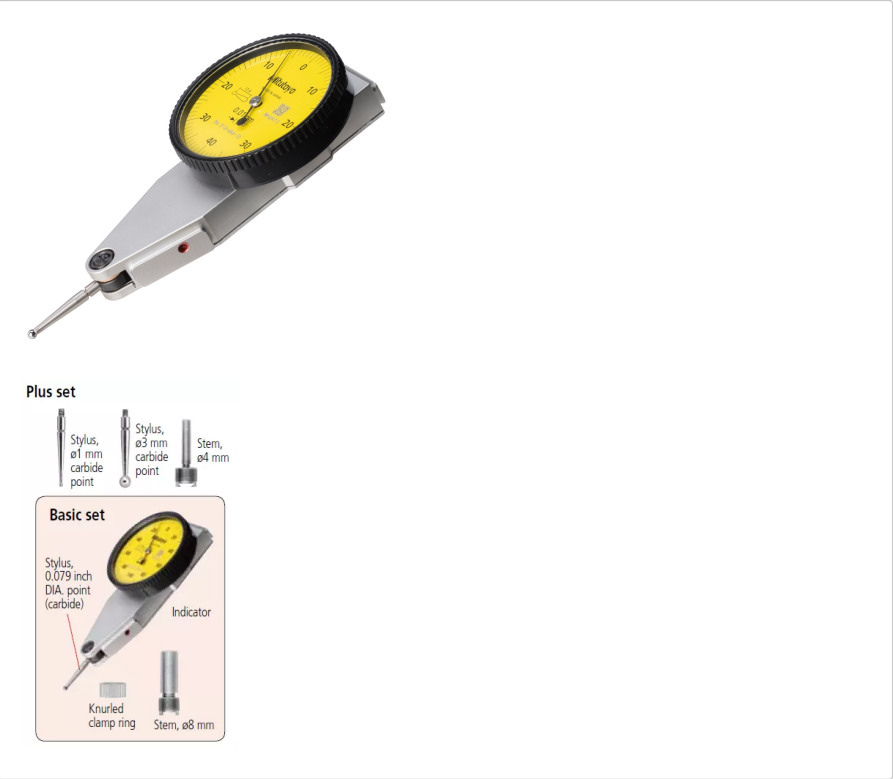

Description

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:


- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.

Specification

Digital/Analog:	Analog
Inch-Metric:	Metric
Delivered:	In a box with stem $\varnothing 8/4$ mm, stylus $\varnothing 1/2/3$ mm
Range:	0.8 mm
Graduation:	0.01 mm
MPE any 10 scale divisions:	5 μm
MPE any 1/2 revolution:	6 μm
MPE measuring range:	8 μm
H MPE (Hysteresis):	3 μm

R MPE (Repeatability):	3 µm
Mass:	53 g
Contact point:	Thread M 1.7 x 0.35
Remarks:	Plus set

Dimensions



L1: 20.9 mm

L2: 17.4 mm

D Ø: 40 mm

Accessories

Optional accessories:



Limit Hands (Green) 2 pcs.

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363

Standard accessories:



Stem for Standard Type Series 513

D=4mm
Art No. 21CAB106
£7.80 ex. VAT



Stem for Standard Type Series 513

D=8mm
Art No. 21CAB104
£5.60 ex. VAT



Knurled Clamp Ring for Stem

Lever Indicator Serie 513
Art No. 190322
£4.50 ex. VAT



Stylus for Serie 513

D= 1mm, 17,4mm Length, Carbide
Art No. 103013
£6.20 ex. VAT



Stylus for Serie 513

D= 2mm, 17,4mm Length, Carbide
Art No. 103006
£10.30 ex. VAT



Stylus for Serie 513

D= 3mm, 17,4mm Length, Carbide

Art No. 103014

£6.20 ex. VAT