




Digital Indicator, Signal ID-C

Item number: 543-352-10

Images

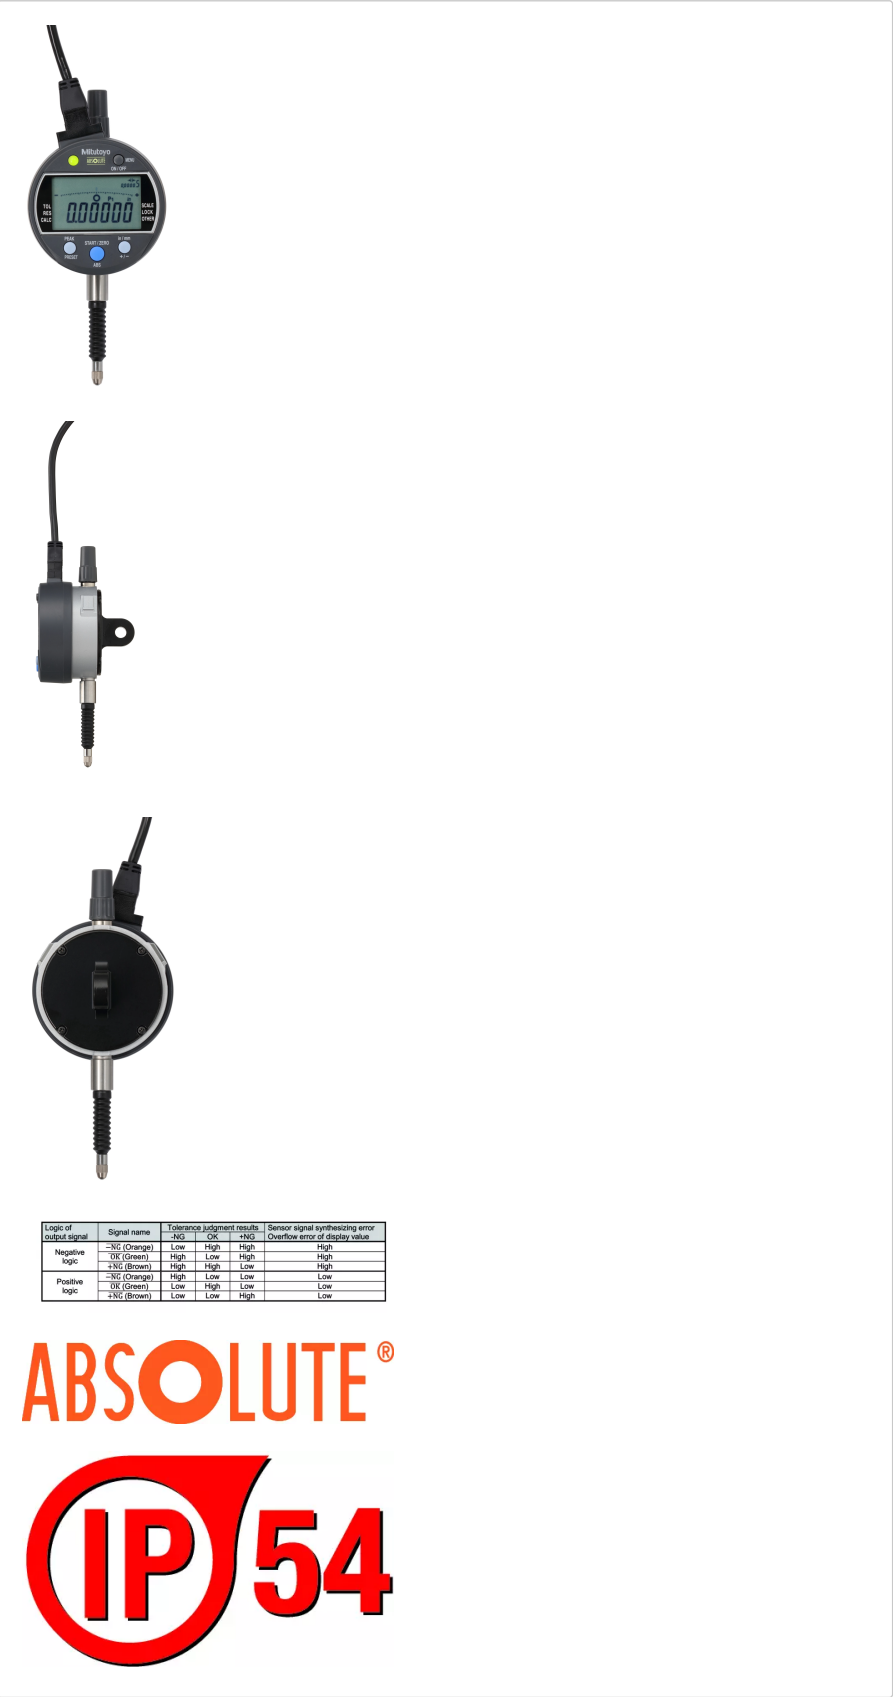

Description

This is an externally-powered Digimatic Indicator with a N-ch open drain -NG, OK, +NG output.


- Dust-protected and protected against splashing water, complying with IEC 60529 (equivalent to IP54)
- Measures MAX/MIN/RANGE (run-out value).
- Saves three different Preset and Tolerance settings.
- Fast measurement frequency mode (detection cycle 50 times/s) for reliable measurement in the peak detection mode (MAX/MIN/RANGE)
- Calculation function Ax. Coefficient A freely definable, x = displacement of the plunger
- Analogue bar graph in the display (12 different scales switchable)
- GO/±NG tolerance judgment function

Specification

Model:	ID-C112JEX2
Digital/Analog:	Digital
Inch-Metric:	Inch/Metric
Delivered:	With signal cable 4 m. One end is fixed to the main unit. No connector is supplied for the other end.
Range:	0.5"/12.7 mm
Digital step:	0.00005"/0.0001"/0.0005"/0.001 mm/0.01 mm
Max. Permissible Error E MPE (Total Range):	±0.0001"/0.003 mm
H MPE (Hysteresis):	0.0001"/0.002 mm
R MPE (Repeatability):	0.0001"/0.002 mm
Measuring force MPL:	≤2.5 N
Protection:	IP54
Type:	ASME/ANSI/AGD Standard
Display:	LCD, character height 8 mm
Max. response speed:	Unlimited
Measurement frequency (MAX/MIN/RANGE):	Standard mode: 100 times/s (plunger speed max. 0.1mm/s for peak measurement)
Alarm:	Low voltage, ABS composition error, overflow error, setting error
Stem Ø:	9.52 mm
Contact point:	Carbide ball, thread: No.4-48UNF
Power supply:	1 battery CR2032
Digital Scale:	Electrostatic capacitance type absolute linear encoder
ON/OFF:	Yes
ABS / INC (INC ZERO):	Yes
PRESET 3x:	Yes
Function lock:	Yes
GO/±NG judgement:	Yes

Counting direction switchable:	Yes
MAX/MIN/RANGE:	Yes
Calculation function (with formula):	Yes
Digimatic data output:	Yes
Analog bar resolution switchable:	Yes
Signal output: (+NG, OK, -NG):	Yes
Signal input: No-voltage input, (PRESET_RECALL/ZERO, HOLD_RESET):	Yes
GO/±NG judgement via LED:	Yes
Inch/Metric switchable:	Yes
Mass:	295 g

Dimensions

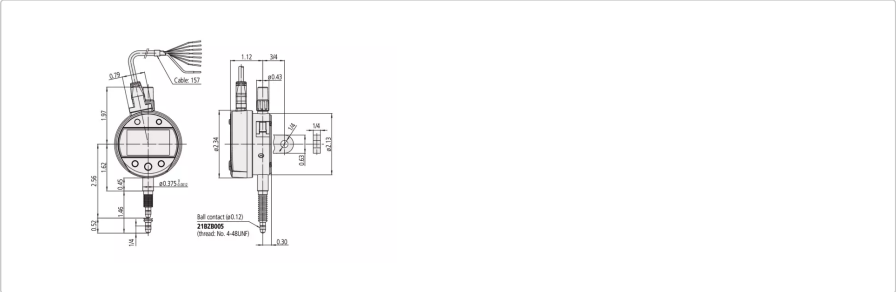

Accessories

Optional accessories:



the standard in world
metrology software





USB-ITPAK Vers. 3.0

USB Dongle + Manual (Software available Online)

Art No. 06AGR543

£343.20 inc. VAT

£286.00 ex. VAT



Spindle Lifting Lever

for 12,7mm Range, ANSI/AGD Type

Art No. 21EZA199

£5.80 ex. VAT

Spindle Lifting Cable

for Indicator, L=500mm
Art No. 21JZA295



Spindle Lifting Cable with Auto Stop

for Indicator, L=300mm
Art No. 21JZA301



Spindle Lifting Knob

for 0,5", ANSI/AGD Type
Art No. 21EZA150

£19.44 inc. VAT
£16.20 ex. VAT



Silicon rubber boot for ID-C, ID-N, ID-S

Art No. 238774



Spare parts

Consumable spares:



NBR Rubber Boot

Digital Gauge Series 543

Art No. 21EAA423

£4.20 ex. VAT



Contact Element Ball Point, 4-48UNF

1/4" Length, Carbide, Inch

Art No. 21BZB005

£8.60 ex. VAT