




Digital Indicator, Calculation ID-C

Item number: 543-591B-10

Images





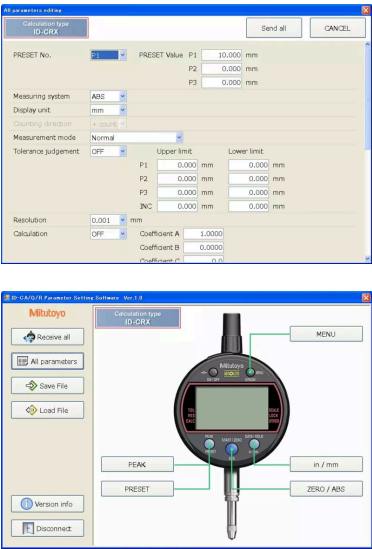

ABSOLUTE®



Description

- This indicator allows you to use a calculation function for the measured value $Ax+B+Cx^{-1}$
- The integrated calculation formula is useful in a variety of applications (e.g. roll diameter measurement)
 - Coefficients A,B and C are freely definable. X = displacement of the plunger
 - Analogue bar graph in the display (14 different scales switchable)
 - GO/±NG tolerance judgement function
 - MAX/MIN/RANGE function to measure peak values
 - A fast measurement frequency mode(detection cycle 20 ms or 50 times/s) is selectable to measure in the peak detection mode (MAX/MIN/RANGE) more reliably
 - Easy indicator setup via a setup menu
 - A USB interface box can be used to set up the indicator from PC via dedicated software


Specification

Model:	ID-C125RMXB2
Digital/Analog:	Digital
Inch-Metric:	Inch/Metric

Delivered:	Including CR2032 battery, lifting handle, certificate of inspection
Range:	1"/25.4 mm
Max. Permissible Error E MPE (Total Range):	±0.0001"/0.003 mm
H MPE (Hysteresis):	0.0001"/0.002 mm
R MPE (Repeatability):	0.0001"/0.002 mm
Measuring force MPL:	≤1.8 N
Protection:	IP42
Type:	EN ISO Standard
Mass:	190 g
Display:	LCD, character height 8 mm, 330° rotatable
Max. response speed:	Unlimited
Measurement frequency (MAX/MIN/RANGE):	Standard mode: 10 times/s fast mode: 50 times/s (plunger speed max. 50 µm/s for peak measurement)
Alarm:	Low voltage, ABS composition error, overflow error, setting error
Stem Ø:	8 mm
Contact point:	Carbide ball, thread: M2.5x0.45
Power supply:	1 battery CR2032
Battery life:	Standard mode: approx. 1 year fast mode: approx. 4.5 month
Digital Scale:	Electrostatic capacitance type absolute linear encoder
Remarks:	Digital step is switchable (12 steps)
ON/OFF:	Yes
ABS / INC (INC ZERO):	Yes
PRESET 3x:	Yes
ABS/INC switchable:	Yes
Function lock:	Yes
GO/±NG judgement:	Yes
DATA/HOLD:	Yes
Counting direction switchable:	Yes
Low voltage alarm:	Yes
MAX/MIN/RANGE:	Yes
Calculation function (with formula):	Yes
Digimatic data output:	Yes

Analog bar resolution switchable:	Yes
Fast measurement mode:	Yes
Selectable resolution:	Yes
Inch/Metric switchable:	Yes

Dimensions

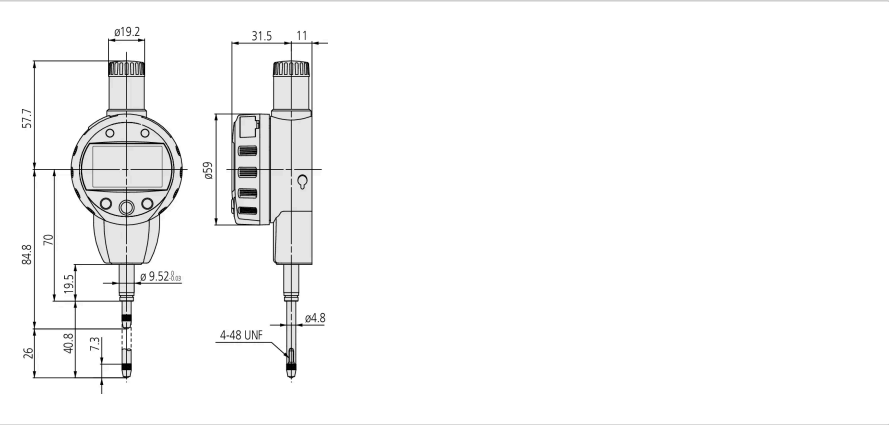

Accessories

Optional accessories:



Digimatic Cable, Flat Straight Type

1m
Art No. 905338
£48.36 inc. VAT
£40.30 ex. VAT



Digimatic Cable, Flat Straight Type

2m
Art No. 905409
£54.24 inc. VAT
£45.20 ex. VAT



USB Input Tool Direct (Digimatic to USB)

2m Cable, Digimatic/Digimatic 2, Flat
Straight Type

Art No. 06AFM380F

£164.40 inc. VAT

£137.00 ex. VAT



Digimatic Input Tool USB

HID/VCP Interface Digimatic/Digimatic2

Art No. 264-016-10

£314.40 inc. VAT

£262.00 ex. VAT

Promotion!



U-WAVE-T, Buzzer Type

Wireless Transmitter

Art No. 02AZD880G

Promo price: **£165.00** ex. VAT

Promo price: **£198.00** inc. VAT

~~Suggested retail price: £230.00 ex. VAT~~

Promotion!



U-WAVE-T, IP67 Type

Wireless Transmitter

Art No. 02AZD730G

Promo price: **£165.00** ex. VAT

Promo price: **£198.00** inc. VAT

~~Suggested retail price: £230.00 ex. VAT~~



U-WAVE fit, IP67 Type

Wireless Transmitter for
Micrometer/Indicator
Art No. 264-622

£276.00 inc. VAT

£230.00 ex. VAT



U-WAVE fit, Buzzer Type

Wireless Transmitter for
Micrometer/Indicator
Art No. 264-623

£276.00 inc. VAT

£230.00 ex. VAT

Promotion!



U-WAVE fit Bluetooth, IP67 Type

Wireless Transmitter for
Micrometer/Indicator
Art No. 264-626

Promo price: **£165.00** ex. VAT

Promo price: **£198.00** inc. VAT

Suggested retail price: ~~£230.00~~ ex. VAT

Promotion!



U-WAVE fit Bluetooth, Buzzer Type

Wireless Transmitter for
Micrometer/Indicator
Art No. 264-627

Promo price: **£165.00** ex. VAT

Promo price: **£198.00** inc. VAT

Suggested retail price: ~~£230.00~~ ex. VAT



Connection Cable F for U-WAVE

Straight, without Data Button
Art No. 02AZD790F

£88.32 inc. VAT

£73.60 ex. VAT



U-WAVE Transmitter Mounting Plate

Universal Type
Art No. 02AZE200

£30.48 inc. VAT

£25.40 ex. VAT



U-WAVE fit Transmitter Mounting Plate

for ID-C, ID-S and ID-F Digital Indicator
Art No. 02AZF670

£42.84 inc. VAT

£35.70 ex. VAT



Spindle Lifting Cable

for Indicator, L=500mm
Art No. 21JZA295



Spindle Lifting Cable with Auto Stop

for Indicator, L=300mm
Art No. 21JZA301



Spindle Lifting Knob

for 25,4mm Range
Art No. 21EZA197
£55.80 ex. VAT



USB Interface for PC Setup

ID-C Indicator
Art No. 21EZA313
£698.40 inc. VAT
£582.00 ex. VAT



Roll Type Base

outside: 45-140mm / inside: 65-100mm
Art No. 21FAJ395
£904.80 inc. VAT
£754.00 ex. VAT



Angle Plate for Calc. ID-C

Radius: 25-70mm
Art No. 21FAJ394
£798.00 inc. VAT
£665.00 ex. VAT



Angle Plate for Calc. ID-C

Radius: 50-100mm
Art No. K541281
£1,280.00 ex. VAT



Angle Plate for Calc. ID-C

Radius: 100-200mm

Art No. K541282

£2,090.00 ex. VAT

Standard accessories:



Lifting Handle for Indicator

for Plunger

Art No. 137693

£1.50 ex. VAT

Spare parts

Consumable spares:



Lithium battery CR-2032

1 pcs.

Art No. 05SAA217D

£10.31 inc. VAT



Contact Element Ball Point, M2,5x0,45

7,3mm Length, Carbide, Metric

Art No. 901312

£7.70 ex. VAT

