


N0031A



Switching amplifiers for Namur sensors

NV1121/230VAC/RL/1D/1G

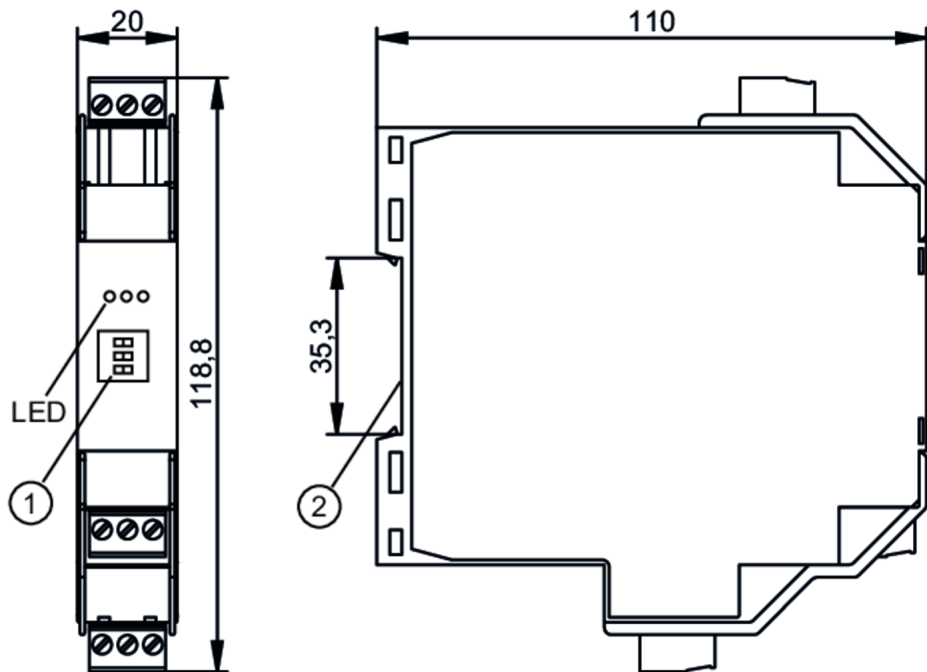

- 1 selector switch
- 2 mounting on DIN rail



Application		
Application	short-circuit monitoring; Wire monitoring	
Electrical data		
Operating voltage tolerance	[%]	-10...10
Operating voltage	[V]	230 AC
Max. power consumption	[VA]	1
Number of channels		1
Outputs		
Electrical design	relay; (1 changeover contact)	
Contact rating	253 V AC / 2 A / cos phi > 0,7 // 40 V DC / 2 A; (ohmic resistance)	
Switching frequency AC	[Hz]	10
Operating conditions		
Ambient temperature	[°C]	-20...60
Protection	IP 20	
Tests / approvals		
Approval	PTB 02 ATEX 2035; IECEx PTB 17.0023	
ATEX marking	II (1) G [Ex ia Ga] IIC	
	II (1) D [Ex ia Da] IIIC	
EMC	EN 50081-2	(1993)
	EN 61326-1	(2006)
MTTF	[years]	458


N0031A



Switching amplifiers for Namur sensors

NV1121/230VAC/RL/1D/1G

Mechanical data		
Weight	[g]	193.5
Switching cycles mechanical		10 million
Displays / operating elements		
Display	switching status	LED, yellow
	operation	LED, green
	function	LED, red
Remarks		
Remarks	Caution The control monitor must be mounted outside the hazardous area.	
	Free terminals must not be used.	
Pack quantity		1 pcs.
Electrical connection		
terminals: ...2.5 mm²		
Connection		

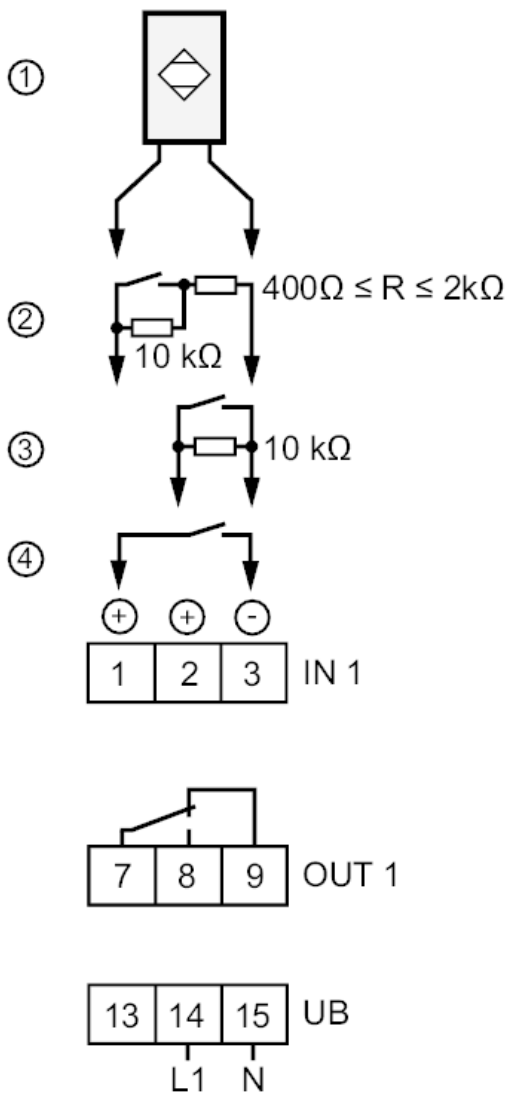

N0031A



Switching amplifiers for Namur sensors

NV1121/230VAC/RL/1D/1G

Other data

Maximum values for control circuit

in protection rating intrinsic safety	[EEx ia] IIC	[EEx ia] IIB	[EEx ib] IIC	[EEx ib] IIB
Voltage [V]	10.6	10.6	10.6	10.6
Current [mA]	19.1	19.1	19.1	19.1
Power [mW]	51	51	51	51
External inductance [mH]	97	390	97	390
External capacitance [µF]	2.32	16.2	2.32	16.2