




Flush pressure sensor

PF-010-REB34-MFRKG/US/ /P

phase-out article

Alternative articles: PM1504 + E30482
When selecting an alternative article and accessories please note that technical data may differ!

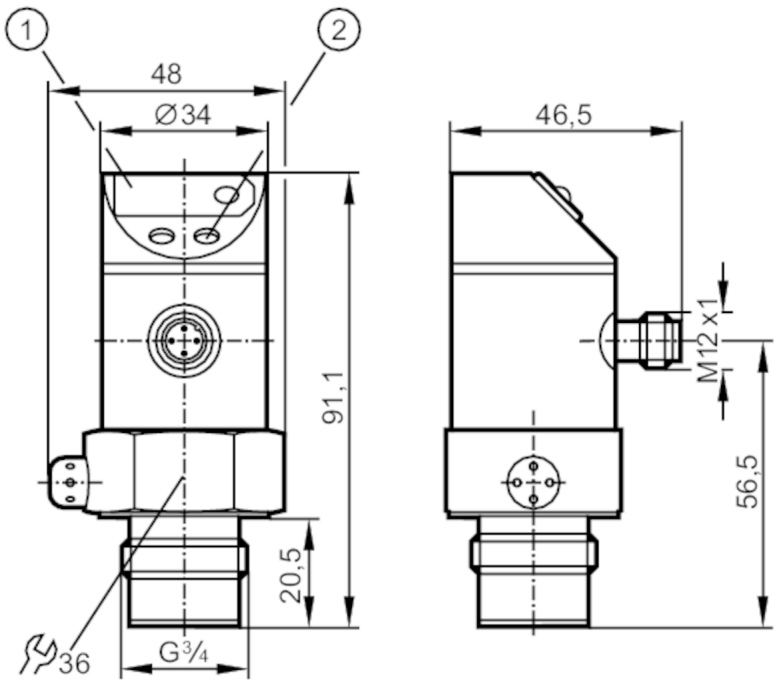

- 1 7-segment LED display
- 2 programming button



Product characteristics				
Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1			
Measuring range	-0.5...10 bar	-7...145 psi	-50...1000 kPa	-0.05...1 MPa
Process connection	threaded connection G 3/4 external thread			
Application				
Special feature	Gold-plated contacts			
Application	flush mountable for the food and beverage industry			
Installation	freely rotatable housing 350°			
Media	viscous media and liquids with suspended particles; liquids and gases			
Medium temperature [°C]	-25...80			
Min. bursting pressure	150 bar	2175 psi	15000 kPa	15 MPa
Pressure rating	50 bar	725 psi	5000 kPa	5 MPa
Type of pressure	relative pressure			
No dead space	yes			
Electrical data				
Operating voltage [V]	20...30 DC			
Current consumption [mA]	< 60			



Flush pressure sensor

PF-010-REB34-MFRKG/US/ /P

Min. insulation resistance	[MΩ]	100; (500 V DC)
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	0.2
Integrated watchdog		yes

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1
------------------------------	---

Outputs

Total number of outputs	2
Output signal	switching signal; analogue signal; (configurable)
Electrical design	PNP/NPN
Number of digital outputs	2
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V] 2
Permanent current rating of switching output DC	[mA] 250
Switching frequency DC	[Hz] < 170
Number of analogue outputs	1
Analogue current output	[mA] 4...20; (scalable 1:4)
Max. load	[Ω] (U _b - 10 V) / 20 mA
Analogue voltage output	[V] 0...10; (scalable 1:4)
Min. load resistance	[Ω] 2000
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Measuring/setting range

Measuring range	-0.5...10 bar	-7...145 psi	-50...1000 kPa	-0.05...1 MPa
Set point SP	-0.45...9.99 bar	-7...145 psi	-45...999 kPa	
Reset point rP	-0.5...9.94 bar	-7...144 psi	-50...994 kPa	
Analogue start point	-0.5...7.49 bar	-7...109 psi	-50...749 kPa	
Analogue end point	2...9.99 bar	29...145 psi	200...999 kPa	
In steps of	0.01 bar	1 psi	1 kPa	
Factory setting		SP1 = 2.50 bar ASP = 0.00 bar	rP1 = 2.30 bar AEP = 9.99 bar	

Accuracy / deviations

Repeatability	[% of the span]	< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)
Characteristics deviation	[% of the span]	< ± 0,6; (Turn down 1:1 , linearity, incl. hysteresis and repeatability , limit value setting to DIN EN IEC 62828-1)
Linearity deviation	[% of the span]	< ± 0,5; (Turn down 1:1)
Hysteresis deviation	[% of the span]	< ± 0,1; (Turn down 1:1)
Long-term stability	[% of the span]	< ± 0,1; (Turn down 1:1; per year)



Flush pressure sensor

PF-010-REB34-MFRKG/US/ /P

Temperature coefficient zero point		< ± 0,1; (0...80 °C)
[% of the span / 10 K]		
Temperature coefficient span		< ± 0,2; (0...80 °C)
[% of the span / 10 K]		
Response times		
Response time	[ms]	< 3
Damping process value dAP	[s]	0...4
Damping for the analogue output dAA in steps	[s]	0 - 0,1 - 0,5 - 2
Max. response time analogue output	[ms]	3
Software / programming		
Parameter setting options		hysteresis / window; normally open / normally closed; switching logic; current/voltage output; Damping; adaptation of displayed values; display can be rotated and switched off; Display unit; zero point; span
Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 67
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)
MTTF	[years]	170
Mechanical data		
Weight	[g]	308.5
Housing		cylindrical
Dimensions	[mm]	Ø 34 / L = 91.1
Materials		stainless steel (316L/1.4404); PBT; PC; PEI; EPDM/X; FKM
Materials (wetted parts)		ceramics (99.9 % Al ₂ O ₃); stainless steel (316L/1.4435); surface characteristics: Ra < 0,4 / Rz 4; FKM; PTFE
Min. pressure cycles		100 million
Process connection		threaded connection G 3/4 external thread
Displays / operating elements		
Display	switching status	2 x LED, red
	function display	7-segment LED display
	measured values	7-segment LED display
Display unit		bar; psi; kPa
Remarks		
Notes		phase-out article
Pack quantity		1 pcs.



Flush pressure sensor

PF-010-REB34-MFRKG/US/ /P

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection



OUT1
OUT2

switching output
switching output
analogue output