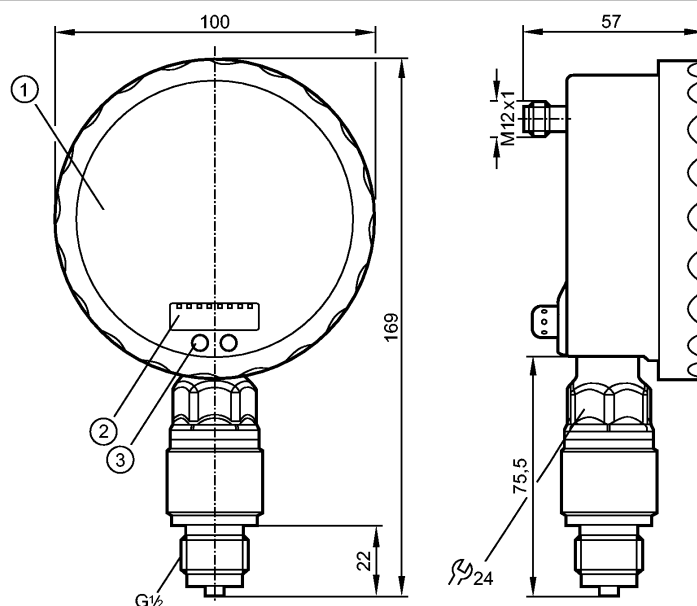


PG2489

PG-,10BREB12-MFRKG/US/ /P

Pressure sensors



- 1: Analogue display
- 2: 4-digit alphanumeric display
- 3: Touch button (programming button)



Made in Germany

Product characteristics

Electronic pressure sensor
with analogue display

Connector

Analogue display 0...350° rotatable

Resolution 0.25%

Pointer not visible when unit disconnected

Process connection: G 1/2

2 outputs

OUT1 = switching output

OUT2 = analogue output

analogue display, 4-digit alphanumeric display

Measuring range: -5...100 mbar / -2.00...40.16 inH2O

Application

Application	Type of pressure: relative pressure Liquids and gases	
Pressure rating	4000 mbar	1606 inH2O
Bursting pressure min.	30000 mbar	12044 inH2O
Medium temperature [°C]	-25...80	

Electrical data

Electrical design	DC PNP/NPN	
Operating voltage [V]	18...32 DC	
Current consumption [mA]	70; (24 V)	
Insulation resistance [MΩ]	> 100 (500 V DC)	
Protection class	III	
Reverse polarity protection	yes	

Outputs

PG2489

PG-,10BREB12-MFRKG/US/ /P

Pressure sensors

Output	2 outputs OUT1 = switching output OUT2 = analogue output	
Output function	1 x normally open / closed programmable + 1 x analogue (4...20 / 20...4 mA, scalable)	
Current rating [mA]	250	
Voltage drop [V]	< 2	
Short-circuit protection	pulsed	
Overload protection	yes	
Switching frequency [Hz]	75	
Analogue output	I: 4...20 mA (Ineg: 20...4 mA)	
Max. load [Ω]	I / Ineg: max. (U _b - 10 V) x 50	

Measuring / setting range		
Measuring range	-5...100 mbar	-2.00...40.16 inH ₂ O
Setting range		
Set point, SP	-4.6...160.0 mbar	-1.84...64.24 inH ₂ O
Reset point, rP	-5.0...159.6 mbar	-2.00...64.08 inH ₂ O
Analogue start point, ASP	-5.0...135.0 mbar	-2.00...54.24 inH ₂ O
Analogue end point, AEP	20.0...160.0 mbar	8.00...64.24 inH ₂ O
in steps of	0.2 mbar	0.08 inH ₂ O

Accuracy / deviations	
Accuracy / deviations (in % of the span) Turn down 1:1	
Switch point accuracy	< ± 0.6
Characteristics deviation *)	< ± 0.35 (BFSL) / < ± 0.6 (LS)
Hysteresis	< ± 0.5
Repeatability **)	< ± 0.1
Long-term stability ***)	< ± 0.1
Temperature coefficients (TEMPCO) in the temperature range 0...70° C (in % of the span per 10 K)	
Greatest TEMPCO of the zero point	< ± 0.3
Greatest TEMPCO of the span	< ± 0.3

Reaction times	
Power-on delay time [s]	6
Min. response time switching output [ms]	9
Damping for the switching output (dAP) [s]	0.01...30
Damping for the analogue output (dAA) [s]	0.01...30
Step response time analogue output [ms]	28
Integrated watchdog	yes

Environment	
Ambient temperature [°C]	-20...80
Storage temperature [°C]	-40...100
Protection	IP 67 / IP 69K

Tests / approvals	
EMC	EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 10 V/m

PG2489

PG-,10BREB12-MFRKG/US/ /P

Pressure sensors

	EN 61000-4-4 Burst:	2 kV
	EN 61000-4-5 Surge:	0.5/1 kV
	EN 61000-4-6 HF conducted:	10 V
Shock resistance	DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6:	20 g (10...2000 Hz)
MTTF [Years]		103

Mechanical data



Process connection	G ½
Materials (wetted parts)	ceramics (Al ₂ O ₃); FPM; stainless steel 316L / 1.4404
Housing materials	stainless steel 316L / 1.4404; PA; FPM (Viton); PTFE; viewing glass: laminated safety glass 4 mm
Switching cycles min.	100 million
Weight [kg]	0.609

Displays / operating elements

Display	Display unit 2 x LED green Switching status LED yellow Switch points LED ring Function display 4-digit alphanumeric display Measured values analogue display, 4-digit alphanumeric display
Extended display range (max.)	160 mbar 64.24 inH ₂ O

Electrical connection

Connection	M12 connector; Gold-plated contacts
------------	-------------------------------------

Wiring

Remarks

Remarks	*) BFSL = Best Fit Straight Line switch point accuracy in the extended display range: 1.5 % of the span **) with temperature fluctuations < 10 K ***) in% of the span / 6 months
---------	---

Pack quantity [piece]	1
-----------------------	---