


SBT633



Flow transmitter with integrated backflow prevention

SBT34XKX10KG/O/US

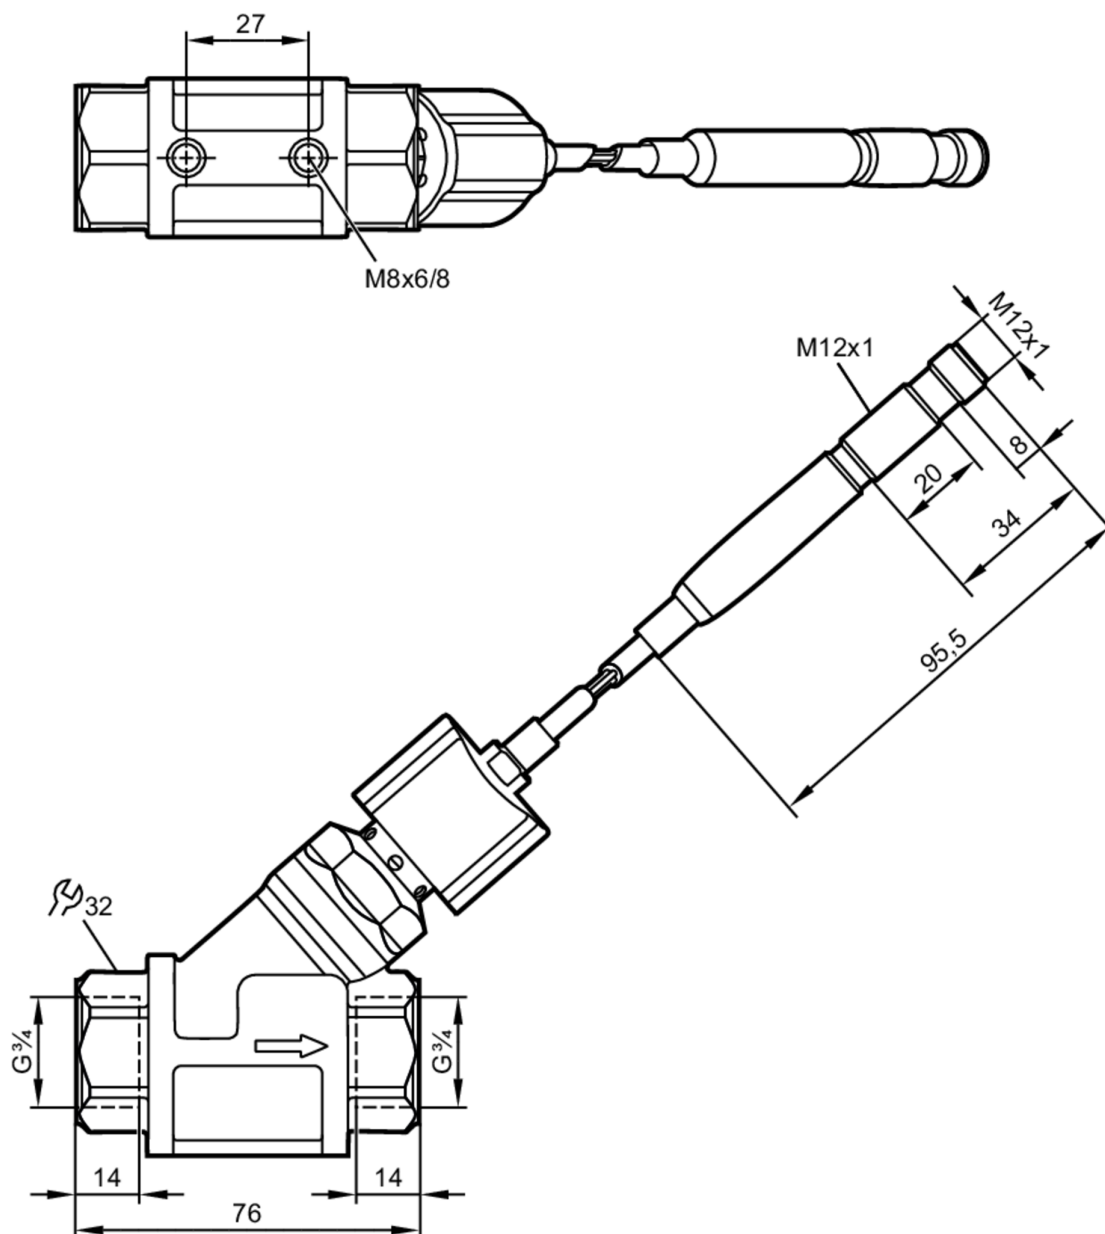

Product characteristics

Measuring range	[l/min]	0.3...25
Process connection	threaded connection G 3/4 internal thread	

Application

Media	Liquids; water	
Medium temperature	[°C]	10...180
Pressure rating	30 bar	3 MPa
Note on pressure rating	static	

Electrical data

Operating voltage tolerance	[%]	-15...10
-----------------------------	-----	----------



Flow transmitter with integrated backflow prevention

SBT34XXKX10KG/O/US

Operating voltage	[V]	24 DC; (to SELV/PELV)
Current consumption	[mA]	< 35
Protection class		III
Reverse polarity protection		yes
Outputs		
Output signal		analogue signal
Analogue current output	[mA]	4...20
Max. load	[Ω]	500
Short-circuit protection		yes
Overload protection		yes
Measuring/setting range		
Measuring range	[l/min]	0.3...25
Accuracy / deviations		
Repeatability		1
	[% of the final value]	
Measuring error		± 5
	[% of the final value]	
Response times		
Response time	[s]	< 0.01
Operating conditions		
Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-15...80
Protection		IP 65; IP 67
Tests / approvals		
EMC		DIN EN 61000-6-2
		DIN EN 61000-6-3
Shock resistance		20 g (11 ms)
Vibration resistance		5 g (10...2000 Hz)
MTTF	[years]	1380
Mechanical data		
Weight	[g]	680.05
Materials		brass white bronze coated; PPS; copper alloy; aluminium anodised; PEI; silicone; O-ring: EPDM; FKM
Materials (wetted parts)		stainless steel (316 / 1.4401); stainless steel (304/1.4301); brass; brass chemically nickel-plated; PPS; O-ring: FKM; magnet: metallic alloy nickel-plated; Two-component adhesive
Process connection		threaded connection G 3/4 internal thread
Switching cycles mechanical		10 million
Remarks		
Remarks		Recommendation Use 200 micron filtration All data refer to water (20 °C).
Pack quantity		1 pcs.

SBT633



Flow transmitter with integrated backflow prevention


SBT34XKX10KG/O/US

Electrical connection

Cable: 0.3 m, silicone



Connection

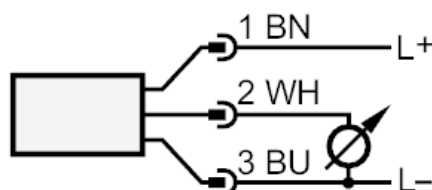


colours to DIN EN 60947-5-2

Core colours :

BN = brown
BU = blue
WH = white

Diagrams and graphs

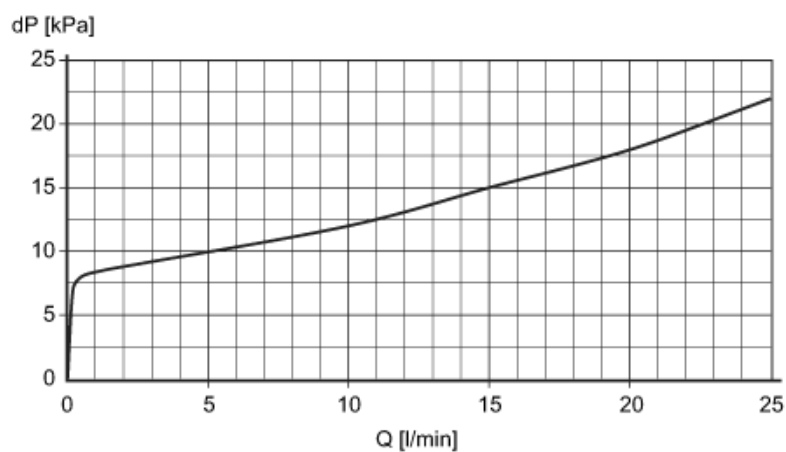

dP Pressure loss

Q volumetric flow quantity