




## Flow meter with integrated backflow prevention and display

SBY34IF0FRKG

Please note the changed housing design!

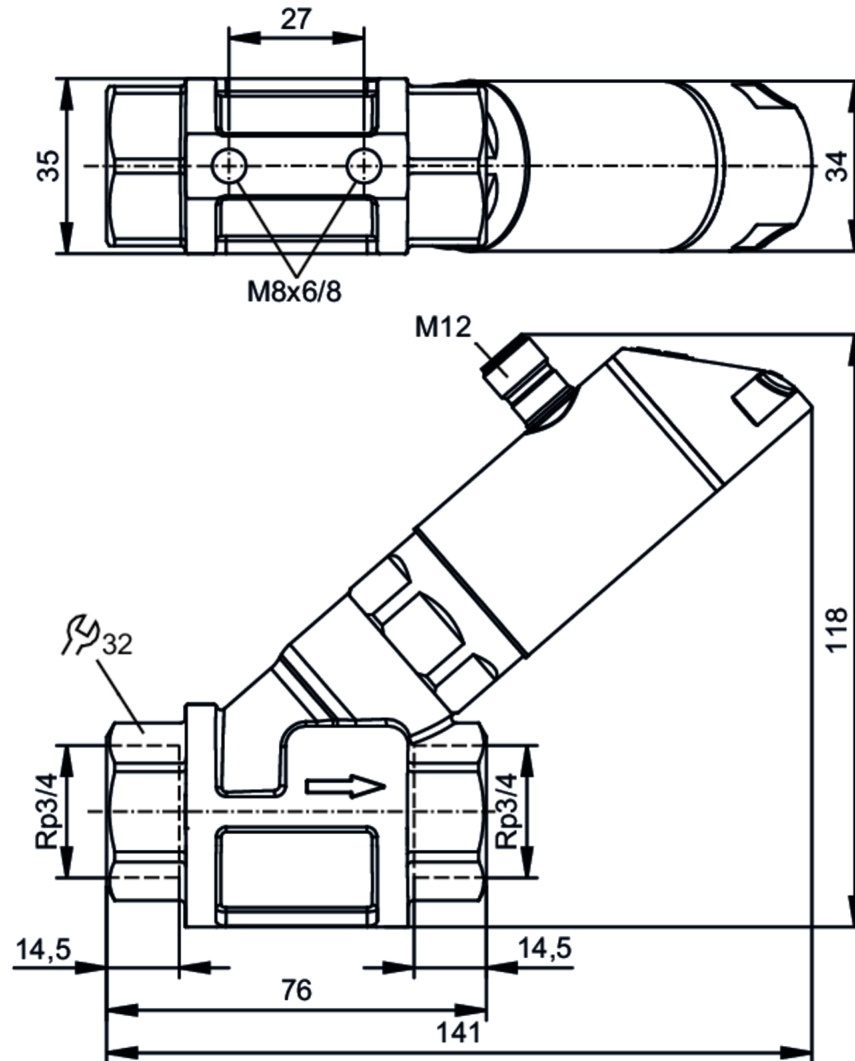

## Product characteristics

|                              |                                                             |                 |
|------------------------------|-------------------------------------------------------------|-----------------|
| Number of inputs and outputs | Number of digital outputs: 2; Number of analogue outputs: 1 |                 |
| Measuring range              | 0.5...25 l/min                                              | 0.03...1.5 m³/h |
| Process connection           | threaded connection Rp 3/4 internal thread                  |                 |

## Application

|                    |       |                                            |
|--------------------|-------|--------------------------------------------|
| Special feature    |       | Gold-plated contacts                       |
| Application        |       | for industrial applications                |
| Media              |       | Liquids; water; glycol solutions; coolants |
| Note on media      |       | oil 1 with viscosity: 10 mm²/s (40 °C)     |
|                    |       | oil 2 with viscosity: 46 mm²/s (40 °C)     |
| Medium temperature | [°C]  | -10...100                                  |
| Pressure rating    | [bar] | 40                                         |
| Pressure rating    | [Mpa] | 4                                          |



## Flow meter with integrated backflow prevention and display

SBY34IF0FRKG

|                                          |       |    |
|------------------------------------------|-------|----|
| MAWP (for applications according to CRN) | [bar] | 40 |
|------------------------------------------|-------|----|

### Electrical data

|                             |      |                            |
|-----------------------------|------|----------------------------|
| Operating voltage           | [V]  | 18...30 DC; (to SELV/PELV) |
| Current consumption         | [mA] | < 50                       |
| Protection class            |      | III                        |
| Reverse polarity protection |      | yes                        |
| Power-on delay time         | [s]  | < 3                        |

### Inputs / outputs

|                              |                                                             |
|------------------------------|-------------------------------------------------------------|
| Number of inputs and outputs | Number of digital outputs: 2; Number of analogue outputs: 1 |
|------------------------------|-------------------------------------------------------------|

### Outputs

|                                                 |                                                                              |
|-------------------------------------------------|------------------------------------------------------------------------------|
| Total number of outputs                         | 2                                                                            |
| Output signal                                   | switching signal; analogue signal; frequency signal; IO-Link; (configurable) |
| Number of digital outputs                       | 2                                                                            |
| Output function                                 | normally open / normally closed; (parameterisable)                           |
| Max. voltage drop switching output DC           | [V] 2                                                                        |
| Permanent current rating of switching output DC | [mA] 150; (per output 2 x 200 (...60 °C); 2 x 250 (...40 °C))                |
| Switching cycles (mechanical)                   | 10 million                                                                   |
| Number of analogue outputs                      | 1                                                                            |
| Analogue current output                         | [mA] 4...20                                                                  |
| Max. load                                       | [Ω] 500                                                                      |
| Short-circuit protection                        | yes                                                                          |
| Overload protection                             | yes                                                                          |
| Frequency of the output                         | [Hz] 0...10000                                                               |

### Measuring/setting range

|                                |                |                 |
|--------------------------------|----------------|-----------------|
| Measuring range                | 0.5...25 l/min | 0.03...1.5 m³/h |
| Display range                  | 0...30 l/min   | 0...1.8 m³/h    |
| Resolution                     | 0.1 l/min      | 0.01 m³/h       |
| Set point SP                   | 0.2...25 l/min | 0.01...1.5 m³/h |
| Reset point rP                 | 0...24.8 l/min | 0...1.49 m³/h   |
| Frequency end point, FEP       | 1.7...25 l/min | 0.1...1.5 m³/h  |
| In steps of                    | 0.1 l/min      | 0.01 m³/h       |
| Frequency at the end point FRP | [Hz]           | 10...10000      |
| Measuring dynamics             |                | 1:50            |

### Temperature monitoring

|                            |      |           |
|----------------------------|------|-----------|
| Measuring range            | [°C] | -10...100 |
| Display range              | [°C] | -32...122 |
| Resolution                 | [°C] | 1         |
| Set point SP               | [°C] | -9...100  |
| Reset point rP             | [°C] | -10...99  |
| In steps of                | [°C] | 1         |
| Frequency start point, FSP | [°C] | -10...78  |



## Flow meter with integrated backflow prevention and display

SBY34IF0FRKG

|                                |      |            |
|--------------------------------|------|------------|
| Frequency end point, FEP       | [°C] | 12...100   |
| Frequency at the end point FRP | [Hz] | 10...10000 |

### Accuracy / deviations

#### Flow monitoring

|                                   |                                                                                                                                             |  |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--|
| Accuracy (in the measuring range) | $\pm (4 \% \text{ MW} + 1 \% \text{ MEW})$ ; ( $Q > 0,5 \text{ l/min}$ ; medium and operating temperature: $+22 \text{ °C} \pm 4\text{K}$ ) |  |
| Repeatability                     | $\pm 1 \% \text{ MEW}$                                                                                                                      |  |

#### Temperature monitoring

|                   |              |                                    |
|-------------------|--------------|------------------------------------|
| Temperature drift | 0,029 °C / K |                                    |
| Accuracy          | [K]          | 3 K (25°C; $Q > 1 \text{ l/min}$ ) |

### Response times

#### Flow monitoring

|                                     |     |       |
|-------------------------------------|-----|-------|
| Response time                       | [s] | 0.01  |
| Damping process value dAP           | [s] | 0...5 |
| Damping for the analogue output dAA | [s] | 0...5 |

#### Temperature monitoring

|                            |     |                                     |
|----------------------------|-----|-------------------------------------|
| Dynamic response T05 / T09 | [s] | T09 = 120 ( $Q > 1 \text{ l/min}$ ) |
|----------------------------|-----|-------------------------------------|

### Software / programming

|                           |                                                                                                                                                                                                                                                                    |  |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Parameter setting options | hysteresis / window; normally open / normally closed; switching logic; current/frequency output; medium selection; damping for the switching output / analogue output; display can be rotated and switched off; standard unit of measurement; process value colour |  |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|

### Interfaces

|                           |                                                            |          |
|---------------------------|------------------------------------------------------------|----------|
| Communication interface   | IO-Link                                                    |          |
| Transmission type         | COM2 (38,4 kBaud)                                          |          |
| IO-Link revision          | 1.1                                                        |          |
| SDCI standard             | IEC 61131-9 CDV                                            |          |
| Profiles                  | Smart Sensor: Process Data Variable; Device Identification |          |
| SIO mode                  | yes                                                        |          |
| Required master port type | A                                                          |          |
| Process data analogue     | 2                                                          |          |
| Process data binary       | 2                                                          |          |
| Min. process cycle time   | [ms]                                                       | 5        |
| Supported DeviceIDs       | Type of operation                                          | DeviceID |
|                           | Default                                                    | 561      |

### Operating conditions

|                             |                                                   |          |
|-----------------------------|---------------------------------------------------|----------|
| Ambient temperature         | [°C]                                              | 0...60   |
| Note on ambient temperature | medium temperature $< 80 \text{ °C}$              |          |
|                             | medium temperature $< 100 \text{ °C}$ : 0...40 °C |          |
| Storage temperature         | [°C]                                              | -15...80 |
| Protection                  | IP 65; IP 67                                      |          |

### Tests / approvals

|     |                  |  |
|-----|------------------|--|
| EMC | DIN EN 61000-6-2 |  |
|     | DIN EN 61000-6-3 |  |



## Flow meter with integrated backflow prevention and display

SBY34IF0FRKG

|                              |                                                                                       |                    |
|------------------------------|---------------------------------------------------------------------------------------|--------------------|
| Shock resistance             | DIN EN 60068-2-27                                                                     | 20 g (11 ms)       |
| Vibration resistance         | DIN EN 60068-2-6                                                                      | 5 g (10...2000 Hz) |
| MTTF [years]                 | 145                                                                                   |                    |
| UL approval                  | UL Approval no.                                                                       | I005               |
| Pressure Equipment Directive | Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request |                    |

### Mechanical data

|                          |                                                                                                                                   |  |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--|
| Weight [g]               | 734.1                                                                                                                             |  |
| Materials                | stainless steel (1.4404 / 316L); PBT+PC-GF30; PBT-GF20; PC; brass chemically nickel-plated                                        |  |
| Materials (wetted parts) | stainless steel (316 / 1.4401); stainless steel (1.4404 / 316L); brass (2.0371); brass chemically nickel-plated; PPS; O-ring: FKM |  |
| Process connection       | threaded connection Rp 3/4 internal thread                                                                                        |  |

### Displays / operating elements

|         |                  |                                         |
|---------|------------------|-----------------------------------------|
| Display | Display unit     | 3 x LED, green                          |
|         | switching status | 2 x LED, yellow                         |
|         | measured values  | alphanumeric display, red/green 4-digit |
|         | programming      | alphanumeric display, 4-digit           |

### Remarks

|               |                                          |  |
|---------------|------------------------------------------|--|
| Remarks       | Recommendation: use a 200-micron filter. |  |
|               | All data refer to water (20 °C).         |  |
|               | MW = measured value                      |  |
|               | MEW = Final value of the measuring range |  |
| Notes         | Please note the changed housing design!  |  |
| Pack quantity | 1 pcs.                                   |  |

### Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated






## Flow meter with integrated backflow prevention and display

SBY34IF0FRKG

### Connection

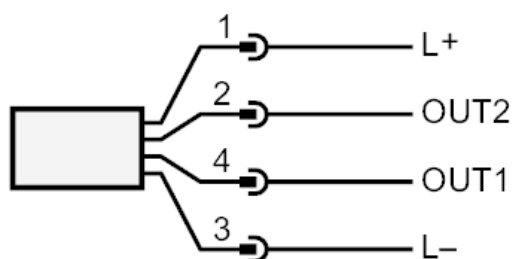

#### OUT1:


- switching output volumetric flow quantity monitoring
- switching output Temperature monitoring
- frequency output volumetric flow quantity monitoring
- frequency output Temperature monitoring
- IO-Link

#### OUT2:

- switching output volumetric flow quantity monitoring
- switching output Temperature monitoring
- analogue output volumetric flow quantity monitoring
- analogue output Temperature monitoring

### Diagrams and graphs

#### Pressure loss

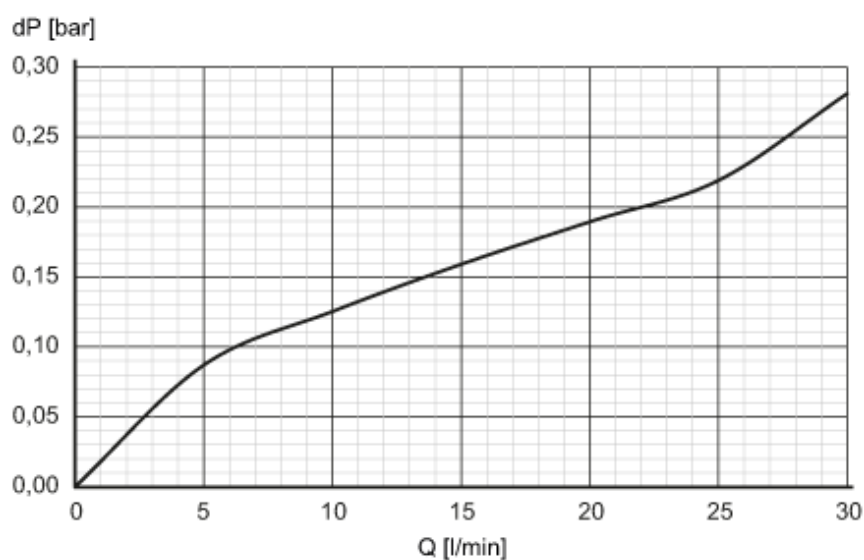

dP Pressure loss

Q volumetric flow quantity