


SD5600



Industrial gas counter

SDR14DGXFRKG/US-100

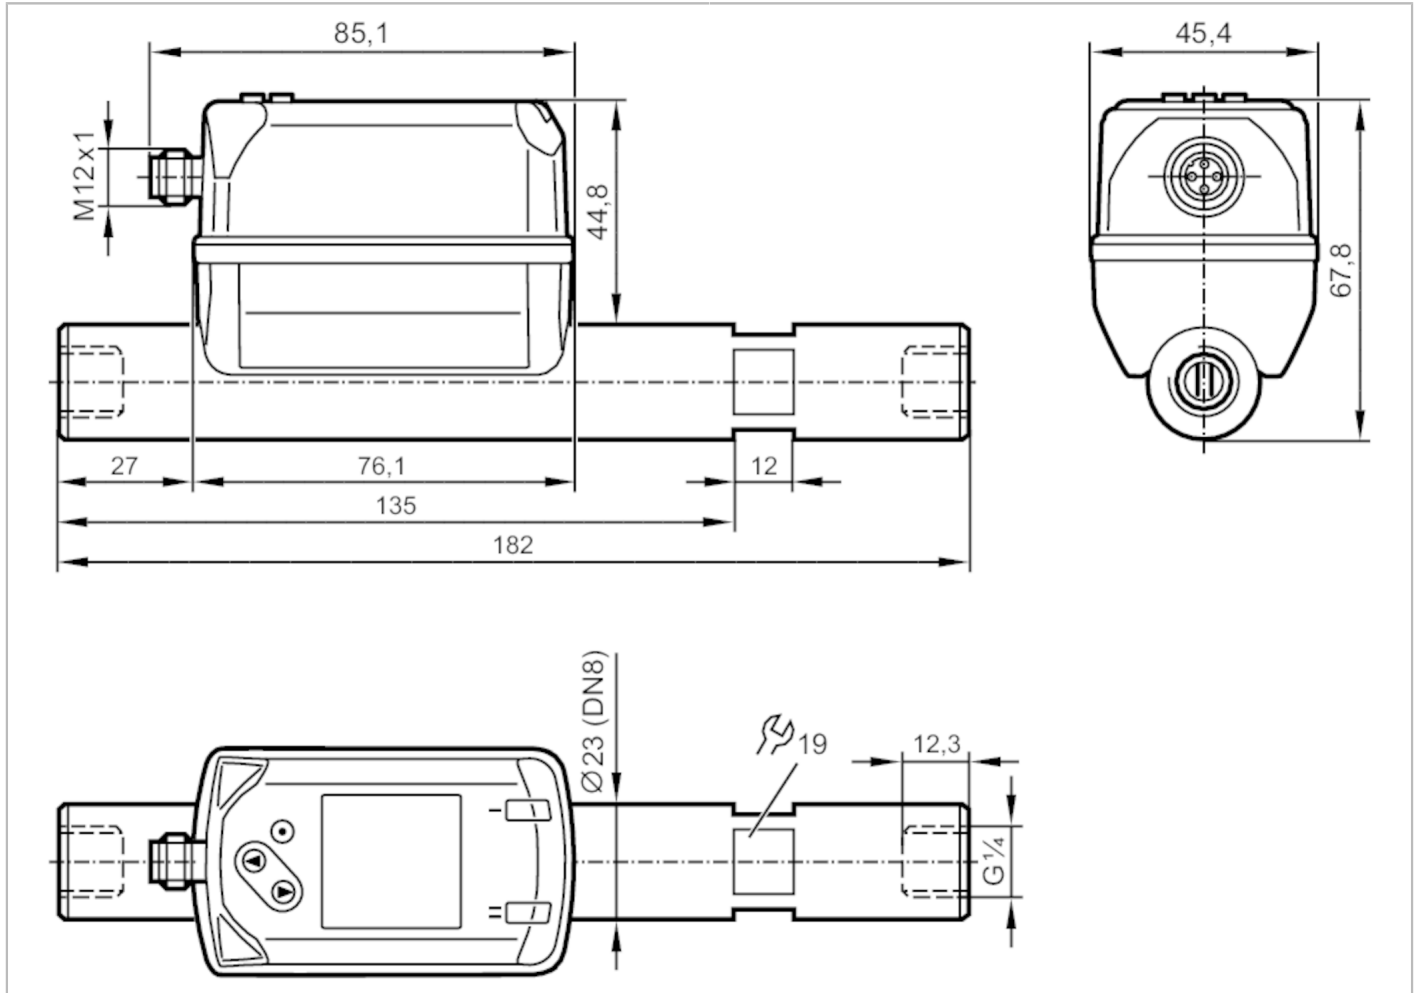

Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1
Process connection	threaded connection G 1/4 DN8
Pressure monitoring	
Measuring range	[bar] -1...16

Application

Application		for industrial applications
Media		Argon (Ar); carbon dioxide (CO2); nitrogen (N2); compressed air
Medium temperature	[°C]	-10...60
Min. bursting pressure	[bar]	64
Min. bursting pressure	[MPa]	6.4
Pressure rating	[bar]	16
Pressure rating	[Mpa]	1.6
MAWP (for applications according to CRN)	[bar]	9.5

Electrical data

Operating voltage	[M]	18...30 DC; (to SELV/PELV)
-------------------	-----	----------------------------



Industrial gas counter

SDR14DGXFRKG/US-100

Current consumption	[mA]	< 80
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	1

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1
------------------------------	---

Inputs

Inputs	counter reset
--------	---------------

Outputs

Output signal	switching signal; analogue signal; pulse signal; IO-Link; (configurable)
Electrical design	PNP/NPN
Number of digital outputs	2
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V] 2.5
Permanent current rating of switching output DC	[mA] 150; (per output)
Number of analogue outputs	1
Analogue current output	[mA] 4...20; (scalable)
Max. load	[Ω] 500
Pulse output	consumed quantity meter
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Measuring/setting range

Measuring range	0.8...250 l/min	0.3...82.9 m/s	0.05...15 m³/h
Display range	0...300 l/min	0...99.5 m/s	0...18 m³/h
Resolution	0.2 l/min	0.1 m/s	0.01 m³/h
Set point SP	2.2...249.9 l/min	0.7...82.9 m/s	0.13...14.99 m³/h
Reset point rP	0.9...248.7 l/min	0.3...82.5 m/s	0.06...14.92 m³/h
Analogue start point ASP	0...200 l/min	0...66.3 m/s	0...12 m³/h
Analogue end point AEP	50...250 l/min	16.6...82.9 m/s	3...15 m³/h
Low flow cut-off LFC	0.3...2.7 l/min	0.1...0.9 m/s	0.02...0.16 m³/h
In steps of	0.1 l/min	0.1 m/s	0.01 m³/h

Pressure monitoring

Measuring range	[bar]	-1...16
Display range	[bar]	-1...20
Resolution	[bar]	0.05
Set point SP	[bar]	-0.92...16
Reset point rP	[bar]	-1...15.92
Analogue start point	[bar]	-1...12.8
Analogue end point	[bar]	2.2...16
In steps of	[bar]	0.01



Industrial gas counter

SDR14DGXFRKG/US-100

Volumetric flow quantity monitoring		
Measuring range	0...100000000 m³	0...353146667.2 scf
Display range	0...100000000 m³	0...353146667.2 scf
Set point SP	0.001...10000000 m³	0.05...353146667.2 scf
Pulse value	0.001...10000000 m³	0.05...353146667.2 scf
In steps of	0.0001 m³	0.005 scf
Pulse length [s]	0.01...2	
Temperature monitoring		
Measuring range	-10...60 °C	14...140 °F
Display range	-24...74 °C	-11.2...165.2 °F
Resolution	0.2 °C	0.5 °F
Set point SP	-9.7...60 °C	14.6...140 °F
Reset point rP	-10...59.7 °C	14...139.4 °F
Analogue start point	-10...46 °C	14...114.8 °F
Analogue end point	4...60 °C	39.2...140 °F
In steps of	0.1 °C	0.1 °F
Accuracy / deviations		
Temperature coefficient [1/K]	± 0,07 % MW	
Accuracy (in the measuring range)	± (6 % MW + 0,6 % MEW); at medium temperature 23 °C	
Repeatability	± (0,4 % MW + 0,1 % MEW)	
Pressure monitoring		
Repeatability [% of the final value]	± 0,2	
Characteristics deviation [% of the final value]	< ± 0,5; (BFSL = Best Fit Straight Line)	
Greatest TEMPCO of the span [% MEW / 10 K]	± 0,3	
Greatest TEMPCO of the zero point [% MEW / 10 K]	± 0,1	
Temperature monitoring		
Accuracy [K]	± 0,5; (medium flow in the limit area of the flow measurement range)	
Response times		
Response time [s]	0.1; (dAP = 0)	
Damping process value dAP [s]	0...5	
Pressure monitoring		
Response time [s]	0.05	
Temperature monitoring		
Dynamic response T05 / T09 [s]	T09 = 0,5	
Software / programming		
Parameter setting options	hysteresis / window; normally open / normally closed; current/pulse output; display can be rotated and switched off; Display unit; totaliser	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	

SD5600



Industrial gas counter

SDR14DGXFRKG/US-100

IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	
Profiles	Digital Measuring Sensor (0x800A), Identification and Diagnosis (0x4000)	
SIO mode	yes	
Required master port type	A	
Process data analogue	8	
Process data binary	2	
Min. process cycle time [ms]	7.2	
Supported DeviceIDs	Type of operation	DeviceID
	Default	861
Operating conditions		
Ambient temperature [°C]	0...60	
Storage temperature [°C]	-20...85	
Max. relative air humidity [%]	90	
Protection	IP 65; IP 67	
Tests / approvals		
EMC	DIN EN 60947-5-9	
CPA approval	model number	003TG
	accuracy class	-
	maximum allowable error	± 7 % FS
	Q (min)	0,05 m³/h (Air)
	Q (t)	-
	Q (max)	15 m³/h (Air)
Vibration resistance	DIN EN 68000-2-6	5 g (10...2000 Hz)
MTTF [years]	183	
UL approval	UL Approval no.	I012
	File number UL	E174189
Pressure Equipment Directive	Sound engineering practice; can be used for stable gases fluid group 2	
Mechanical data		
Weight [g]	558	
Materials	PBT+PC-GF30; PPS GF40; stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); steel (1.5523) galvanised; 2.0401 (brass / CW614N); FKM	
Materials (wetted parts)	EN AW-6082 (aluminium); stainless steel (1.4305 / 303); FKM; ceramics glass passivated; PPS GF40; Al2O3 (ceramics); acrylate	
Process connection	threaded connection G 1/4 DN8	
Displays / operating elements		
Display		colour display 1,44", 128 x 128 pixels
		2 x LED, yellow
Remarks		
Remarks	MW = measured value	
	MEW = Final value of the measuring range	
	Standard conditions: 1013.25 mbar / 15 °C / 0 % relative humidity	
	For information about installation and operation please see the operating instructions.	
Pack quantity	1 pcs.	



Industrial gas counter


SDR14DGXFRKG/US-100

Electrical connection

Connector: 1 x M12; coding: A



Connection

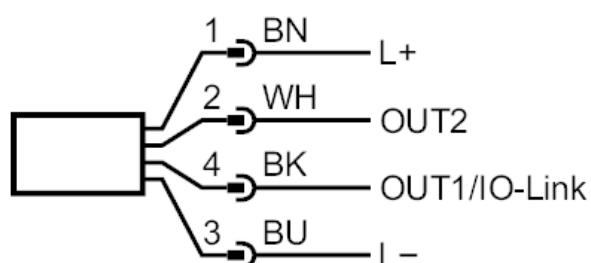

OUT1/IO-Link:
switching output flow
switching output temperature
switching output pressure
Pulse output quantity meter

OUT2/InD:
signal output Preset counter
switching output flow
switching output temperature
switching output pressure
analogue output flow
analogue output temperature
analogue output pressure
signal output Preset counter
Pulse output quantity meter
input counter reset