




Dial Test Indicator, Horiz. 20° Face

Item number: 513-446-10T

Images

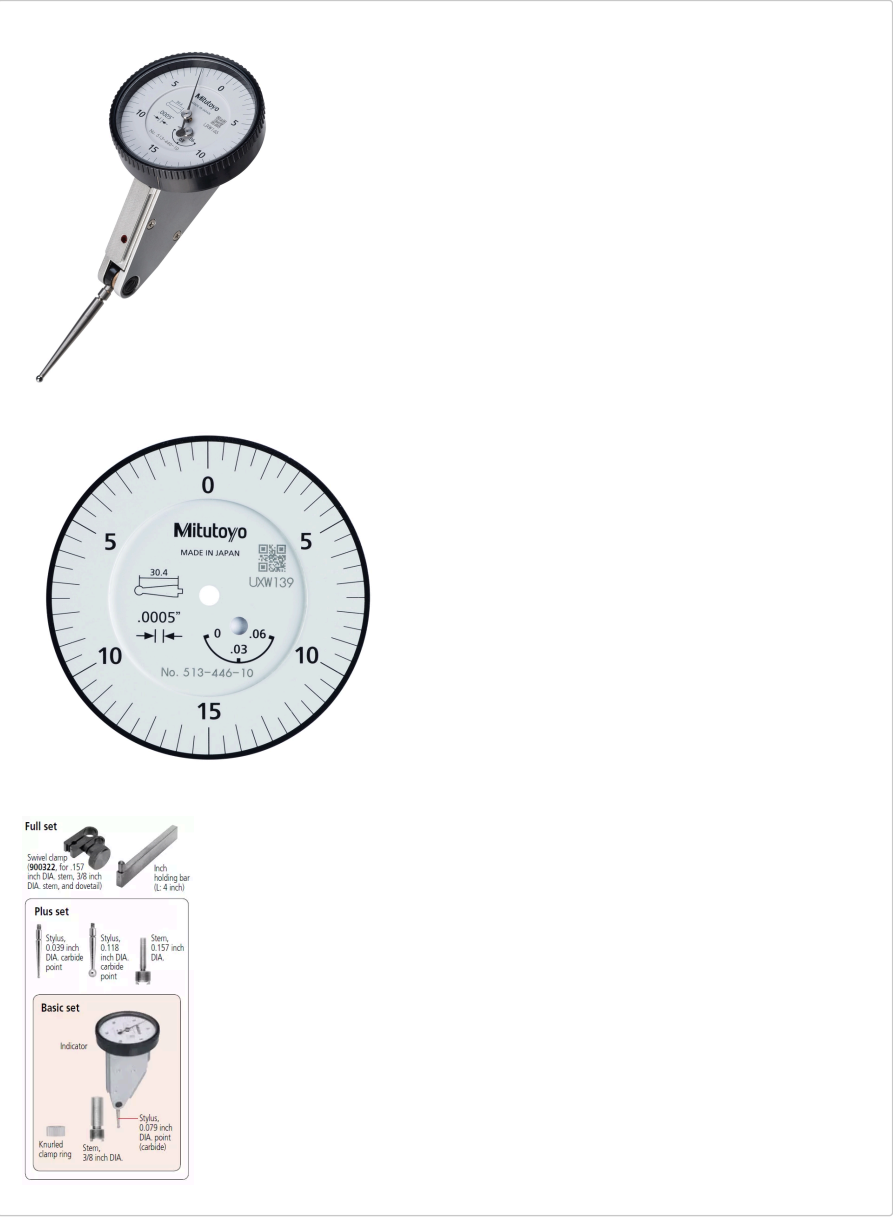

Description


- Centered, bi-directional action for automatic reversal of measuring direction.
- Rotatable scale for easy zero setting. Jewelled bearings and precision gears and pinions for smooth, accurate movement and quick response.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	In a box with stem $\varnothing 3/8"$ (9.52 mm) / 0.157" (4 mm), stylus $\varnothing 0.039"/0.079"/0.118"$, swivel clamp / holding bar
Range:	0,06 "

Dial reading:	0-15-0
Graduation:	0.0005"
H MPE (Hysteresis):	0.0002"
R MPE (Repeatability):	±0.0002"
MPE first one revolution:	±0.0005"
MPE first 2 1/2 revolutions:	±0.0005"
Measuring force:	0,01-0,3 N
Mass:	48 g
Contact point:	Thread M 1.7 x 0.35
Remarks:	Full set

Dimensions

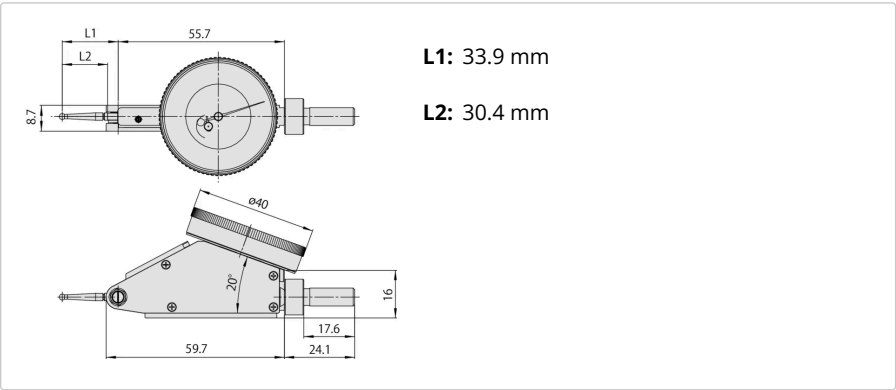

Accessories

Optional accessories:



Limit Hands (Green) 2 pcs.

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363

Standard accessories:

Stylus for Series 513

Ã 2mm, 1,20" length
Art No. 136290

**Stem for Standard Type Series 513**

D=4mm
Art No. 21CAB106
£7.80 ex. VAT



Art No. 901162

**Stylus for Series 513**

Ø1mm, 1,20" length, Carbide
Art No. 136291
£4.20 ex. VAT



Art No. 21CAB105



Stylus for Series 513

Ø3mm, 1,20" length
Art No. 136292



Knurled Clamp Ring for Stem

Lever Indicator Serie 513
Art No. 190322
£4.50 ex. VAT

