




# Dial Test Indicator, Horizontal, Compact

Item number: 513-463-10E

Images

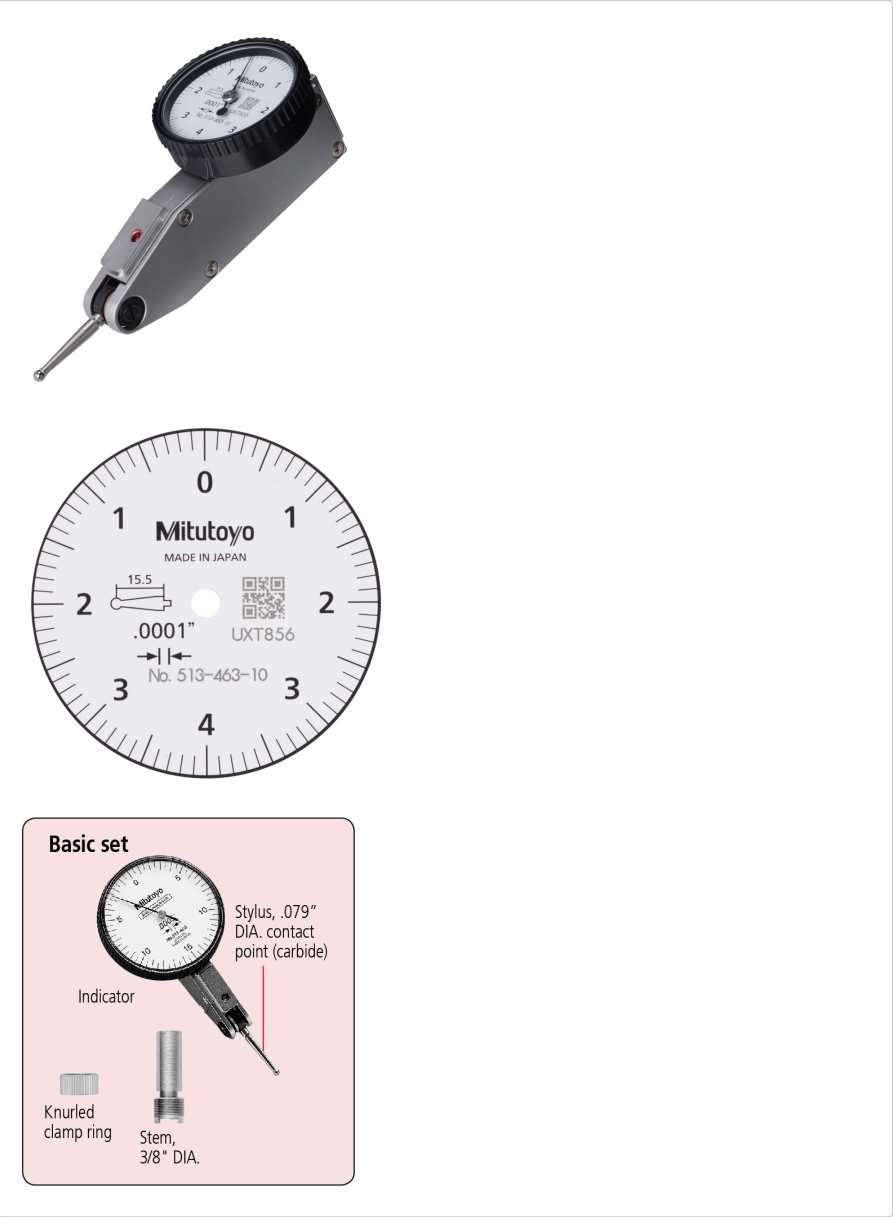

Description

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:


- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	In a box with stem ø3/8" (9.52 mm), stylus ø0.079"

<b>Range:</b>	0,008 "
<b>Dial reading:</b>	0-4-0
<b>Graduation:</b>	0.0001"
<b>H MPE (Hysteresis):</b>	0.0001"
<b>R MPE (Repeatability):</b>	±0.00004"
<b>MPE first one revolution:</b>	±0.0001"
<b>Measuring force:</b>	0,01-0,3 N
<b>Mass:</b>	55 g
<b>Contact point:</b>	Thread M 1.7 x 0.35
<b>Remarks:</b>	Basic set
<b>Compact type:</b>	Yes

## Dimensions



**L1:** 19 mm

**L2:** 15.5 mm

## Accessories

Optional accessories:



**Limit Hands (Green) 2 pcs.**

Dial Indicator Series 1, Test Indicator  
Art No. 21AAB363

**Standard accessories:**

Art No. 21CAB105





### Knurled Clamp Ring for Stem

Lever Indicator Serie 513

Art No. 190322

**£4.50** ex. VAT



Art No. 21CZB064

**£2.50** ex. VAT