




Dial Test Indicator, Horiz., Ruby Sty.

Item number: 513-471-10E

Images

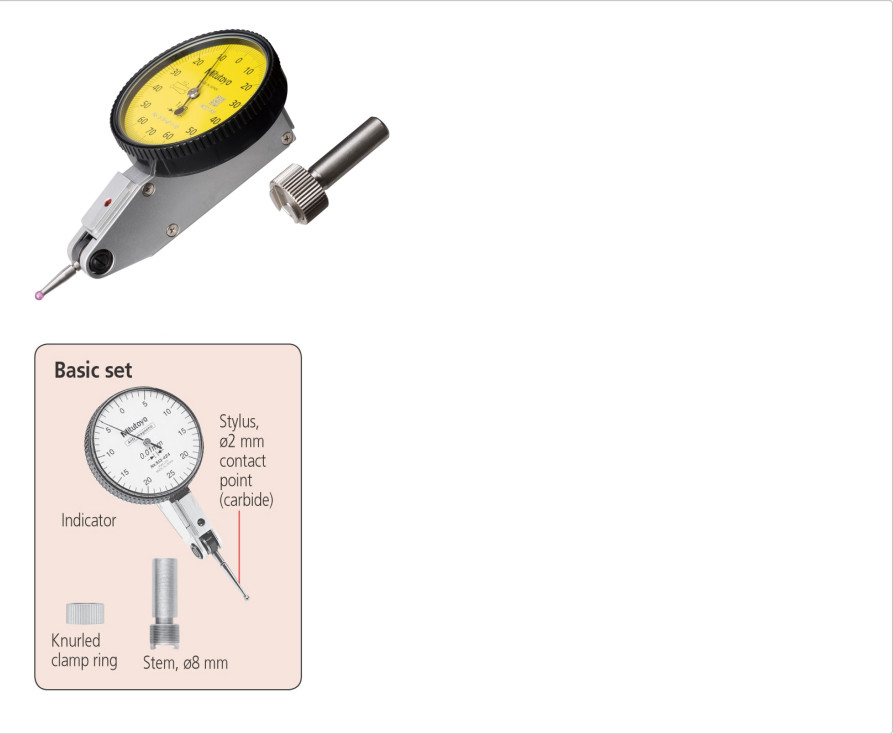

Description

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:


- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement.

Specification

Digital/Analog:	Analog
Inch-Metric:	Metric
Delivered:	In a box with stem ø8 mm, stylus ø2 mm
Range:	0.14 mm
Dial reading:	0-70-0
Graduation:	0.001 mm
MPE any 10 scale divisions:	2 µm
MPE any 1/2 revolution:	3 µm
MPE measuring range:	3 µm
H MPE (Hysteresis):	2 µm
R MPE (Repeatability):	1 µm

Measuring force:	0,01 - 0,3 N
Ruby stylus tip ø2 mm No.:	21CZA209
Mass:	45 g
Contact point:	Thread M 1.7 x 0.35
Remarks:	Basic set - Ruby contact point

Dimensions

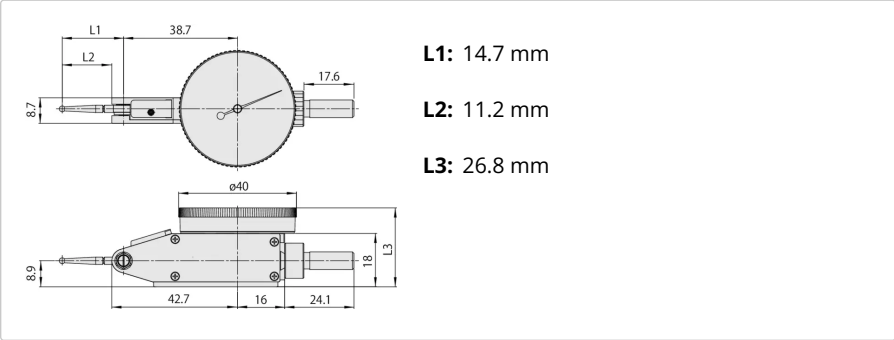

Accessories

Optional accessories:



Limit Hands (Green) 2 pcs.

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363

Standard accessories:



Stem for Standard Type Series 513

D=8mm
Art No. 21CAB104
£5.60 ex. VAT



Stylus for Series 513

D= 2mm, 11,2mm Length, Ruby
Art No. 21CZA209

£18.00 inc. VAT

£15.00 ex. VAT



Knurled Clamp Ring for Stem

Lever Indicator Serie 513

Art No. 190322

£4.50 ex. VAT