




## Welding adapter for process sensors

ADAPT, D3/ZERO VOID/R=19/T=2.00

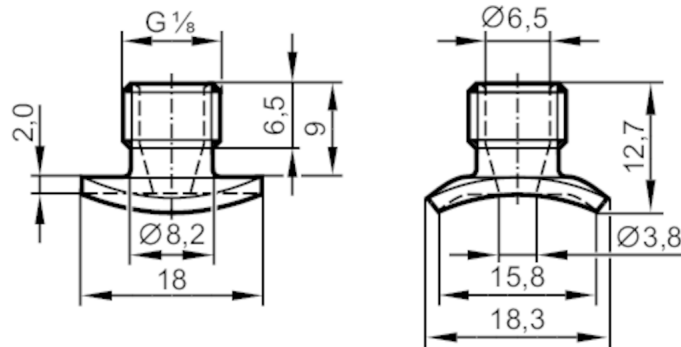

EC 1935/2004 FDA

### Application

|                         |                                     |     |
|-------------------------|-------------------------------------|-----|
| Pressure rating         | [bar]                               | 120 |
| Note on pressure rating | for the connection sensor - adapter |     |

### Tests / approvals

|                                  |                                                                                                                                                    |  |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Pressure Equipment Directive     | A possible classification to PED depends on the application and has to be carried out by the user / operator.                                      |  |
| Pressure Equipment Directive EAC | The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013. |  |
| Safety instructions              | The compatibility between medium and product material has to be checked in all applications.                                                       |  |

### Mechanical data

|                                                   |                                                                                      |     |
|---------------------------------------------------|--------------------------------------------------------------------------------------|-----|
| Weight                                            | [g]                                                                                  | 9.3 |
| Materials                                         | stainless steel (1.4404 / 316L)                                                      |     |
| Sensor connection                                 | G 1/8 internal thread Ø 3 mm                                                         |     |
| Process connection                                | welding adapter Ø 18 mm ; nominal pipe size: DN25...DN100; pipe wall thickness: 2 mm |     |
| Surface characteristics Ra/Rz of the wetted parts | < 0.4 / -                                                                            |     |

### Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|