




Y connection cable

YSDGHBC0MSS00,2HBCSTGHBC0MSS

Please see the technical note under "Downloads"

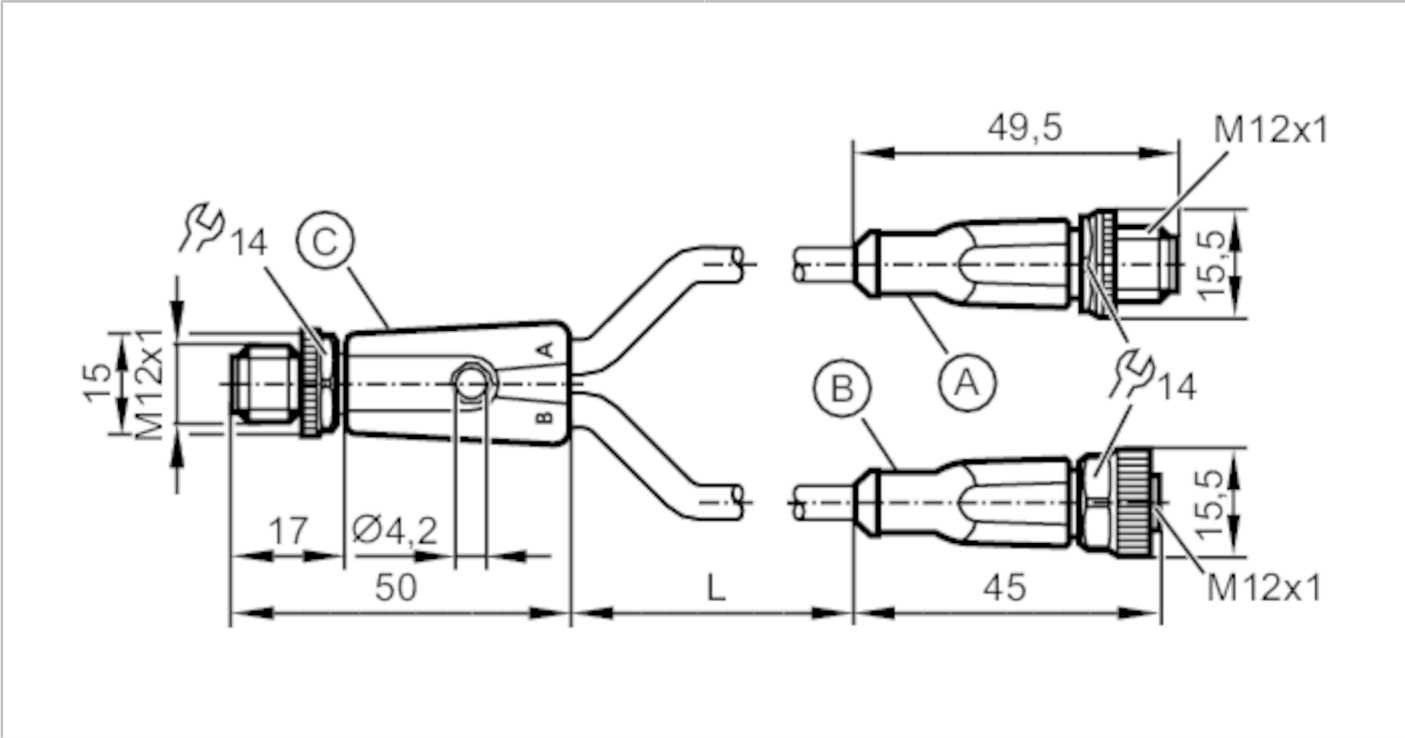

Application		
Special feature	Free from silicone; Halogen-free; Gold-plated contacts; Drag chain suitability	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	24 DC
Protection class		II
Max. current load total	[A]	3
Operating conditions		
Ambient temperature	[°C]	-25...90
Storage temperature	[°C]	-25...55
Storage humidity	[%]	10...100
Other climatic conditions for storage according to stated class	1K22/ DIN 60721-3-1	
Protection	IP 65; IP 67; IP 68; IP 69K	
Mechanical data		
Weight	[g]	60.1
Moulded-body material	TPU / TPU	
Material nut	brass, nickel-plated	
Sealing material	FKM	
Drag chain suitability	yes	



Y connection cable


YSDGHBC0MSS00,2HBCSTGHBC0MSS

Drag chain suitability	bending radius for flexible use	min. 10 x cable diameter
	bending radius for fixed installation	min. 5 x cable diameter
	travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s²
	bending cycles	> 5 Mio.
	torsional strain	± 180 °/m > 2 Mio.

Remarks	
Notes	Please see the technical note under "Downloads"
Pack quantity	1 pcs.

Electrical connection - plug C


Connector: M12, straight; coding: A; Moulded body: TPU, orange; Locking: threaded sleeve, brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm; Take into account the maximum value of the counterpart!



Electrical connection

Cable: 0.2 m, PUR, Halogen-free, black, Ø 4.3 mm; 3 x 0.34 mm² (42 x Ø 0.1 mm) + 4 x 0.34 mm² (42 x Ø 0.1 mm)

Connection

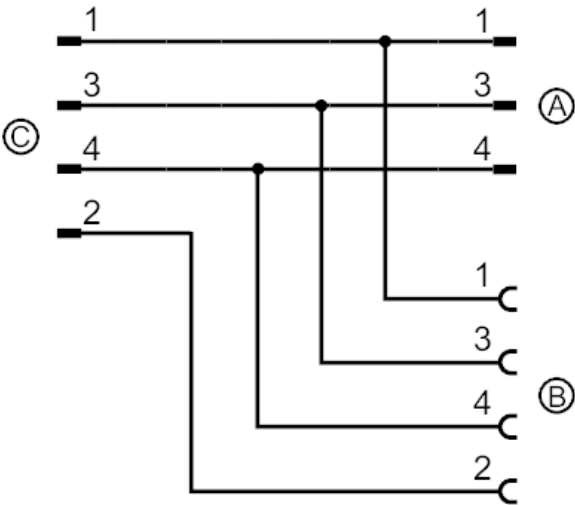




Y connection cable

YSDGHBC0MSS00,2HBCSTGHBC0MSS

Electrical connection - plug A

Connector: M12, straight; coding: A; Moulded body: TPU, orange; Locking: threaded sleeve, brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm; Take into account the maximum value of the counterpart!



Electrical connection - socket B

Connector: M12, straight; coding: A; Moulded body: TPU, orange; Locking: Lock nut, brass, nickel-plated; Sealing: FKM; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm; Take into account the maximum value of the counterpart!

