



# Dial Gauge, Lug Back, ANSI/AGD Type

Item number: 2514A

## Images



## Description

**Standard Type, 0,5" / 0,125" Range, 0,001" / 0,005" Graduation - Inch**

This is a standard, inch dial indicator. It offers you the following benefits:


- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

## Features

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	With certificate of inspection, bezel clamp
Range:	0,5" "
Range per rev.:	0,05"
Dial reading:	±0-50
Graduation:	0,0005"
H MPE (Hysteresis):	0,00016"
R MPE (Repeatability):	±0,0001"
MPE first one revolution:	±0,0005"

MPE first 2 1/2 revolutions:	±0,0005"
MPE > 2 1/2-10 revolutions:	±0,0015"
Type:	ANSI/AGD Standard
Measuring force:	0,4-1,8 N
Mass:	164 g
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4-48UNF
Continuous dial:	Yes

Dimensions

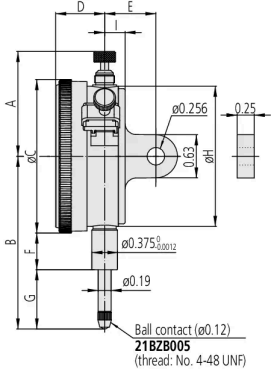

**A:** 1.53 inch

**B:** 2.52 inch

**C:** 2.24 inch

**D:** 0.71 inch

**E:** 3/4 inch

**F:** 0.54 inch


**G:** 0.87 inch

**H:** 2.05 inch

**I:** 0.3 inch


Accessories

Optional accessories:



**Limit Hands (green) 2pcs**

Dial Indicator Series 2/3/4  
Art No. 21AZB195  
Price on application



**Spindle Lifting Lever**

for Digital Indicator, A-Type Dial Indicator  
Serie 2/3/4  
Art No. 21EZA198  
Price on application

### Spindle Lifting Cable

for Indicator, L=500mm

Art No. 21JZA295

Price on application



### Spindle Lifting Cable with Auto Stop

for Indicator, L=300mm

Art No. 21JZA301

Price on application



### Spare parts

#### Consumable spares:

### Contact Element Ball Point, 4-48UNF

1/4" Length, Carbide, Inch

Art No. 21BZB005

Suggested retail price: 15.00 €\*

