



Dial Gauge, Lug Back, ANSI/AGD Type

Item number: 3424A-19

Images



Description

This is a standard, inch dial indicator. It offers you the following benefits:


- Large-diameter dial face $\varnothing = 78\text{ mm}$ for easy reading
- Supplied with limit markers and a bezel clamp as standard
- $0.001'' / 0.0001''$ graduation

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	With certificate of inspection, bezel clamp
Range:	2 "
Range per rev.:	0,1"
Dial reading:	$\pm 0-100$
Graduation:	0.001"
H MPE (Hysteresis):	0,00033"
R MPE (Repeatability):	$\pm 0,0002''$

MPE first one revolution:	±0,001"
MPE first 2 1/2 revolutions:	±0,001"
MPE > 2 1/2-10 revolutions:	±0,002"
MPE > 10-20 revolutions:	±0,003"
Type:	ANSI/AGD Standard
Measuring force:	0,4-3 N
Mass:	321 g
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4-48UNF
Continuous dial:	Yes
Coaxial revolution counter:	Yes
Shockproof:	Yes

Dimensions

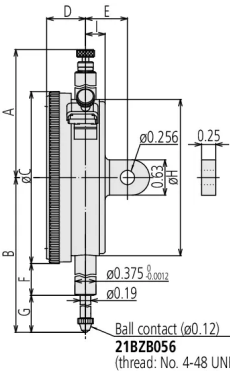

A: 3.31 inch

B: 5.88 inch

C: 3.07 inch

D: 0.7 inch

E: 3/4 inch

F: 1.99 inch

G: 2.35 inch

H: 2.8 inch

I: 0.35 inch

Accessories

Optional accessories:




Limit Hands (green) 2pcs

Dial Indicator Series 2/3/4

Art No. 21AZB195

Standard accessories:**Bezel Clamp for Dial Gauge**

Inch, Series 2/3/4
Art No. 21RZA065
£2.30 ex. VAT

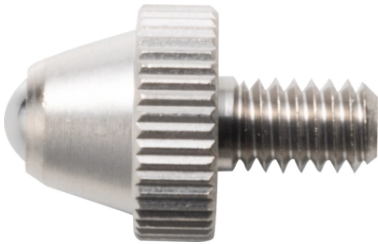Spare parts**Consumable spares:****Contact Element Ball Point, 4-48UNF**

1/4" Length, Carbide, Inch
Art No. 21BZB056
£4.10 ex. VAT