




Dial Gauge, Lug Back, ANSI/AGD Type

Item number: 3426A-19

Images

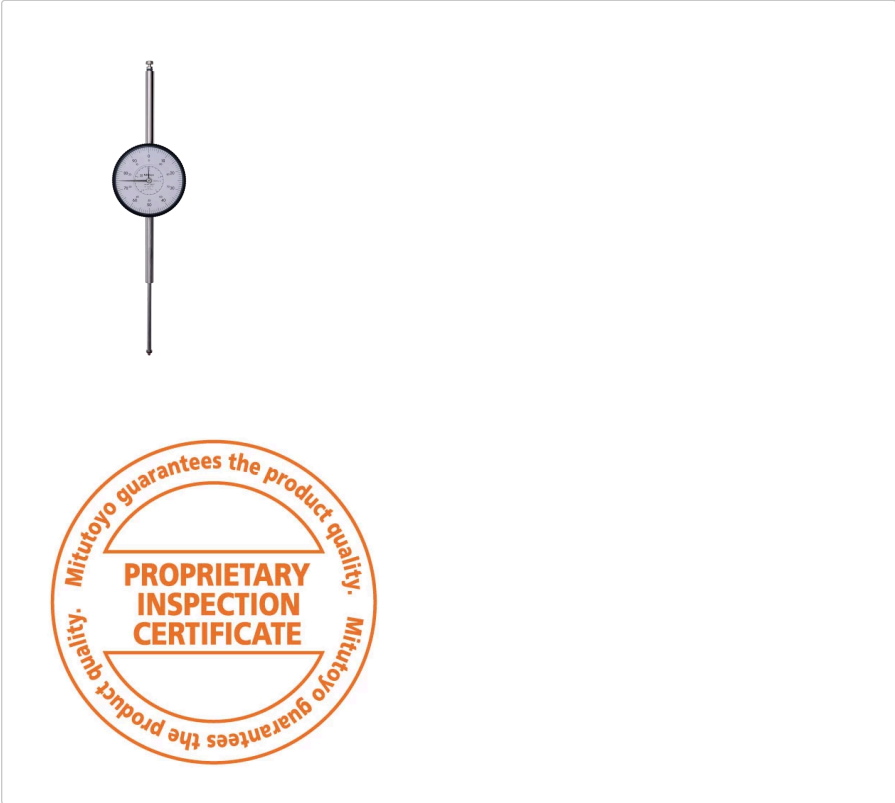

Description

This is a standard, inch dial indicator. It offers you the following benefits:


- Large-diameter dial face $\varnothing = 78\text{ mm}$ for easy reading
- Supplied with limit markers and a bezel clamp as standard
- 0,001" / 0,0001" graduation

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	With certificate of inspection, bezel clamp
Range:	3 "
Range per rev.:	0,1"
Dial reading:	$\pm 0.0\text{-}100.0$
Graduation:	0.001"
H MPE (Hysteresis):	0,00033"
R MPE (Repeatability):	$\pm 0,0002$ "

MPE first one revolution:	±0,001"
MPE first 2 1/2 revolutions:	±0,001"
MPE > 2 1/2-10 revolutions:	±0,002"
MPE > 10-20 revolutions:	±0,003"
MPE > 20 revolutions:	±0,005"
Type:	ANSI/AGD Standard
Measuring force:	0,4-3 N
Mass:	340 g
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4.0-48.0UNF
Continuous dial:	Yes
Coaxial revolution counter:	Yes
Shockproof:	Yes

Dimensions

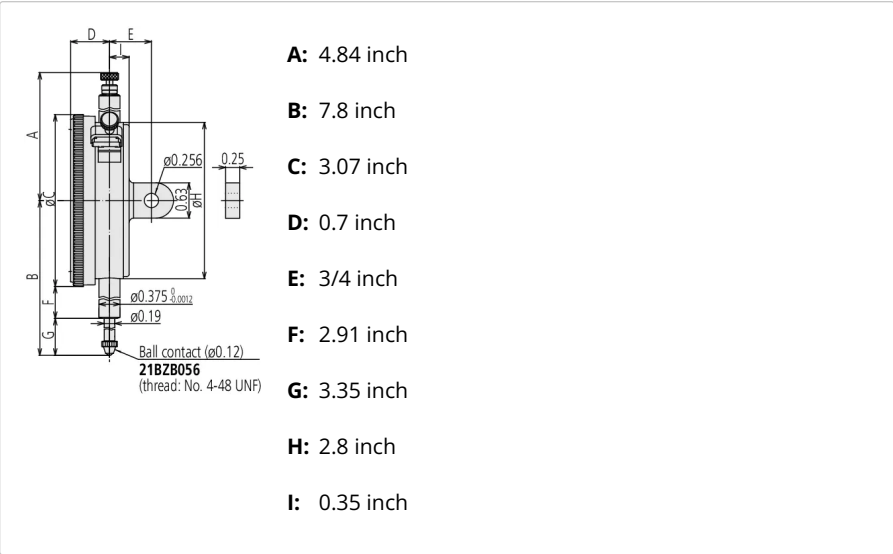

Accessories

Optional accessories:

Two green limit hands for the dial indicator. The hands are made of a durable material and are designed to be attached to the dial indicator to provide a visual indication of the measurement range. The hands are shown in two different positions, one pointing upwards and one pointing downwards.


Limit Hands (green) 2pcs

Dial Indicator Series 2/3/4
Art No. 21AZB195

Standard accessories:**Bezel Clamp for Dial Gauge**

Inch, Series 2/3/4

Art No. 21RZA065

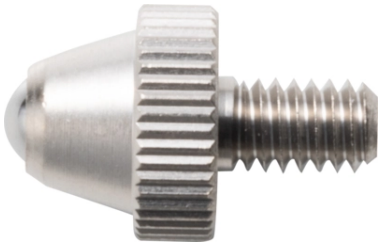£2.30 ex. VAT**Spare parts****Consumable spares:****Contact Element Ball Point, 4-48UNF**

1/4" Length, Carbide, Inch

Art No. 21BZB056

£4.10 ex. VAT