



Dial Gauge, Flat Back, ANSI/AGD Type

Item number: 4887AB-19

Images



Description

This is a standard dial indicator. It offers you the following benefits:


- Large-diameter dial face $\varnothing = 92$ mm for easy reading

Specification

Digital/Analog:	Analog
Inch-Metric:	Inch
Delivered:	With certificate of inspection, bezel clamp
Range:	3 "
Range per rev.:	0,1"
Dial reading:	± 0 -100
Graduation:	0,001"
H MPE (Hysteresis):	0,00033"
R MPE (Repeatability):	$\pm 0,0002$ "
MPE first one revolution:	$\pm 0,001$ "

MPE first 2 1/2 revolutions:	±0,001"
MPE > 2 1/2-10 revolutions:	±0,002"
MPE > 10-20 revolutions:	±0,003"
MPE > 20 revolutions:	±0,005"
Type:	ANSI/AGD Standard
Measuring force:	0,4-3 N
Mass:	392 g
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4-48UNF
Continuous dial:	Yes
Coaxial revolution counter:	Yes
Shockproof:	Yes

Dimensions

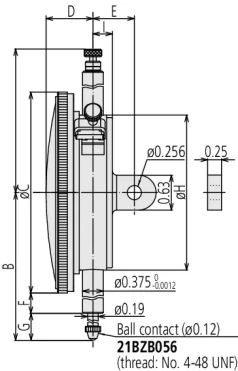

A: 4.84 inch

B: 7.8 inch

C: 3.62 inch

D: 0.85 inch

E: 3/4 inch

F: 2.63 inch

G: 3.35 inch

H: 2.8 inch

I: 0.35 inch

Accessories

Optional accessories:



Limit Hands (green) 2pcs

Dial Indicator Series 2/3/4


Art No. 21AZB195

Standard accessories:

**Bezel Clamp for Dial Gauge**

Inch, Series 2/3/4
Art No. 21RZA065
£2.30 ex. VAT

Spare parts**Consumable spares:**

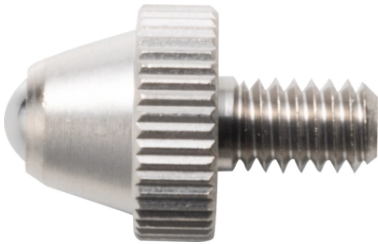**Contact Element Ball Point, 4-48UNF**

1/4" Length, Carbide, Inch
Art No. 21BZB056
£4.10 ex. VAT