



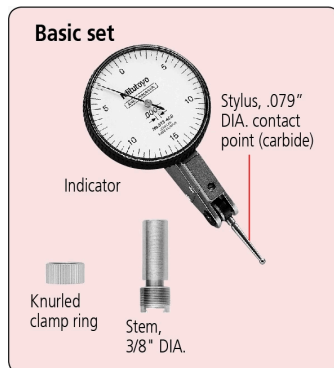

Dial Test Indicator, Horizontal, Compact

Item number: 513-462-10E

Images

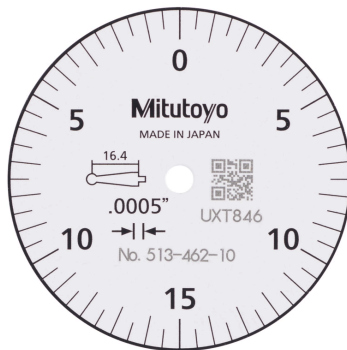

Description

This is a Dial Test Indicator (Lever Type) which offers you the following benefits:

- Drastically enhanced durability, sensitivity and visibility.
- Glare-free flat crystal face allows easy reading of graduations.
- O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
- The stylus length is on the dial face to reorder a replacement
- Multi-layer coatings on the crystal.


Specification

Digital/Analog:

Analog

Inch-Metric:	Inch
Delivered:	In a box with stem ø3/8" (9.52 mm), stylus ø0.079"
Range:	0,03 "
Dial reading:	0-15-0
Graduation:	0.0005"
H MPE (Hysteresis):	0.0002"
R MPE (Repeatability):	±0.0002"
MPE first one revolution:	±0.0005"
Measuring force:	0,01-0,3 N
Carbide stylus tip ø2 mm No.:	133195
Mass:	55 g
Contact point:	Thread M 1.7 x 0.35
Remarks:	Basic set
Compact type:	Yes

Dimensions



L1: 19.9 mm

L2: 16.4 mm

Accessories

Optional accessories:



Limit Hands (Green) 2 pcs.

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363

Standard accessories:

Art No. 21CAB105



Knurled Clamp Ring for Stem

Lever Indicator Serie 513

Art No. 190322

£4.50 ex. VAT



Point Dia 2mm/513

L=0.76"

Art No. 133195

