





Dial Test Indicator, Horiz., Ruby Sty.

Item number: 513-477-10E

Images



Description


- This is a Dial Test Indicator (Lever Type) which offers you the following benefits:
- Drastically enhanced durability, sensitivity and visibility.
 - Glare-free flat crystal face allows easy reading of graduations.
 - O-ring seal on the bezel has the effect of providing smooth rotation and prevents dust and oil from penetrating through to the dial face.
 - The stylus length is on the dial face to reorder a replacement
 - Multi-layer coatings on the crystal.

Specification

Digital/Analog:	Analog
-----------------	--------

Inch-Metric:	Metric
Delivered:	In a box with stem $\varnothing 8$ mm, stylus $\varnothing 2$ mm
Range:	1 mm
Dial reading:	0-50-0
Graduation:	0.01 mm
MPE any 10 scale divisions:	5 μm
MPE any 1/2 revolution:	8 μm
MPE measuring range:	10 μm
H MPE (Hysteresis):	4 μm
R MPE (Repeatability):	3 μm
Measuring force:	0.01-0.3 N
Ruby stylus tip $\varnothing 2$ mm No.:	21CZA211
Mass:	45 g
Contact point:	Thread M 1.7 x 0.35
Remarks:	Basic set - Rubys contact point

Dimensions

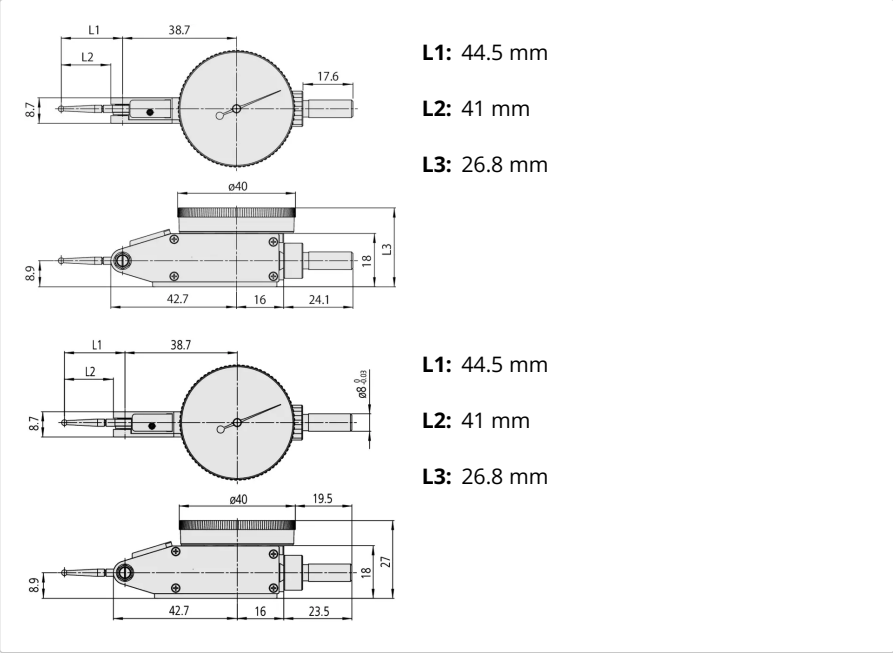

Accessories

Optional accessories:

**Limit Hands (Green) 2 pcs.**

Dial Indicator Series 1, Test Indicator
Art No. 21AAB363

Standard accessories:**Stem for Standard Type Series 513**

D=8mm
Art No. 21CAB104
£5.60 ex. VAT

**Stylus for Serie 513**

D= 2mm, 41mm Length, Ruby
Art No. 21CZA211
£15.60 ex. VAT

**Knurled Clamp Ring for Stem**

Lever Indicator Serie 513
Art No. 190322
£4.50 ex. VAT

